

NOTES:

1. GOLD PLATE 1.5 μ m MIN OVER 2.0 μ m MIN NICKEL.
2. NO LEAD TO BE ELECTRICALLY CONNECTED TO THE DIE ATTACH PAD. SEAL RING ISOLATED.
3. NOTCH METALLIZE TO BE CONNECTED TO THE DIE ATTACH PAD.
4. NTK SPEC YS-1002 SHALL APPLY.

REV.	DESCRIPTION	DATE
1	NEW DRAWING	MAR-2012
2	NEW DRAWING	MAY-01-1992

1	CERAMIC	BA-914
2	LEAD	ALLOY42
3	LEAD	ALLOY42


APPROVED	SIGNATURE	SCALE
M. UNO	SHIMURA	

CUSTOMER	TITLE
NGK SPARK PLUG CO., LTD.	18LD S/B PACKAGE

DWG NO.	PART NO.	SHEET	OF
IDK18F1-245GC		1	1



LATEST REVISION'S DESCRIPTION

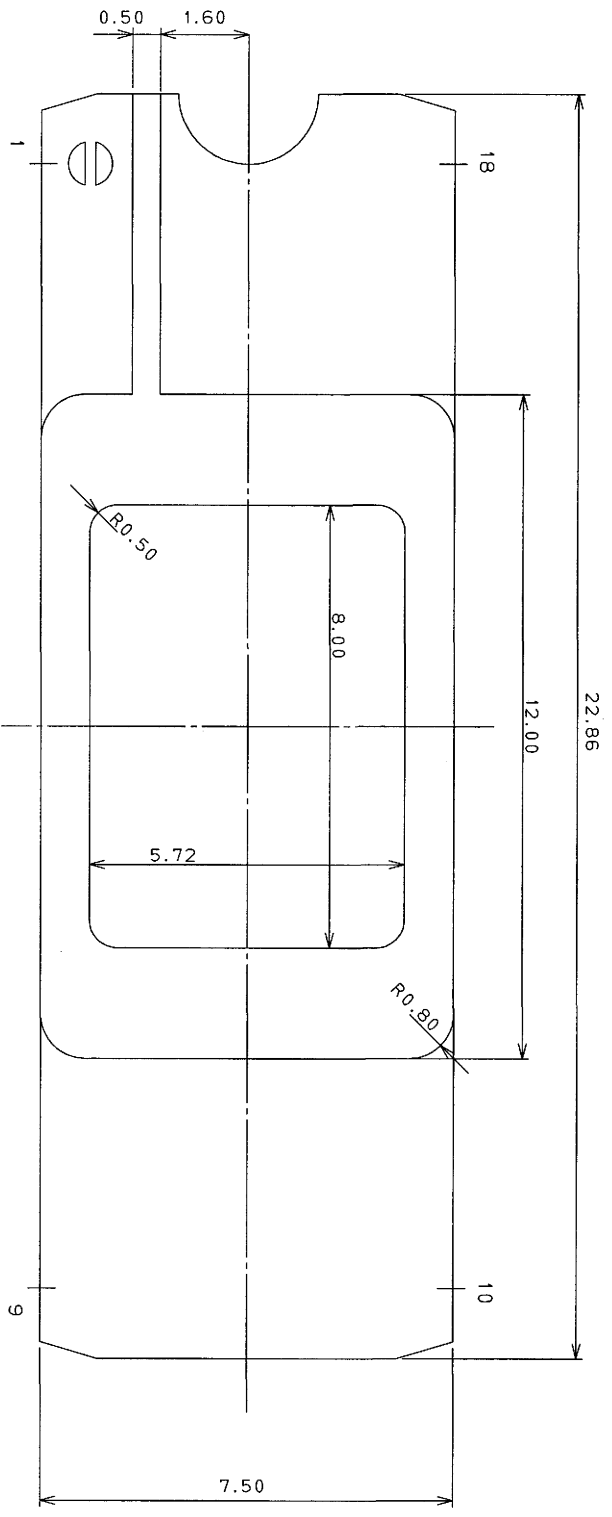


MODIFIED DWG NO.	1
	2
	3
	4
	5
	6
	7
	8

DESCRIPTION	DRAWN	M. UNO	Rev.	NEW DRAWING	DATE	MAY-01
FILE NAME	CHECKED	M. UNO	NTK	NGK SPARK PLUG CO. LTD.		
CUSTOMER	APPROVED	S. NISHIMURA	TITLE	S/R PATTERN		
DWG NO.	UNIT	MM (英制)	DWG NO.	P-IDS-245G-3		
	SCALE					

PART NO. _____ SHEET _____ OF _____



REV.	REVISION	S	DESCRIPTION
10			
11			

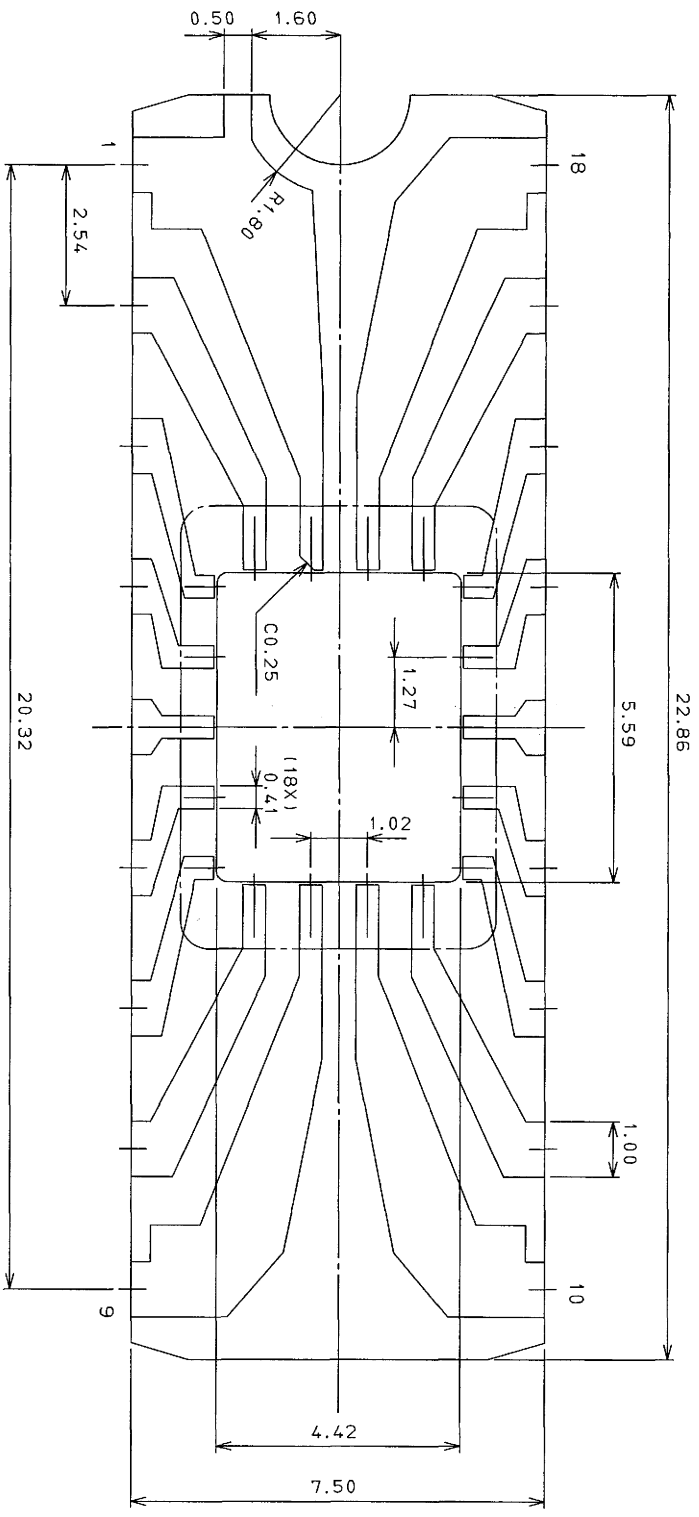


(P*2.54X8)

MODIFIED	
DWG NO.	1

DESCRIPTION	DRAWN	M. UNO	DATE	MAY-01-2012
FILE NAME	CHECKED	M. UNO		
CUSTOMER	APPROVED	S. SHITMURA		
DWG NO.	UNIT	MM		
	SCALE			
			DWG NO.	P-IDK-245A-1

PART NO.	SHEET	OF
----------	-------	----

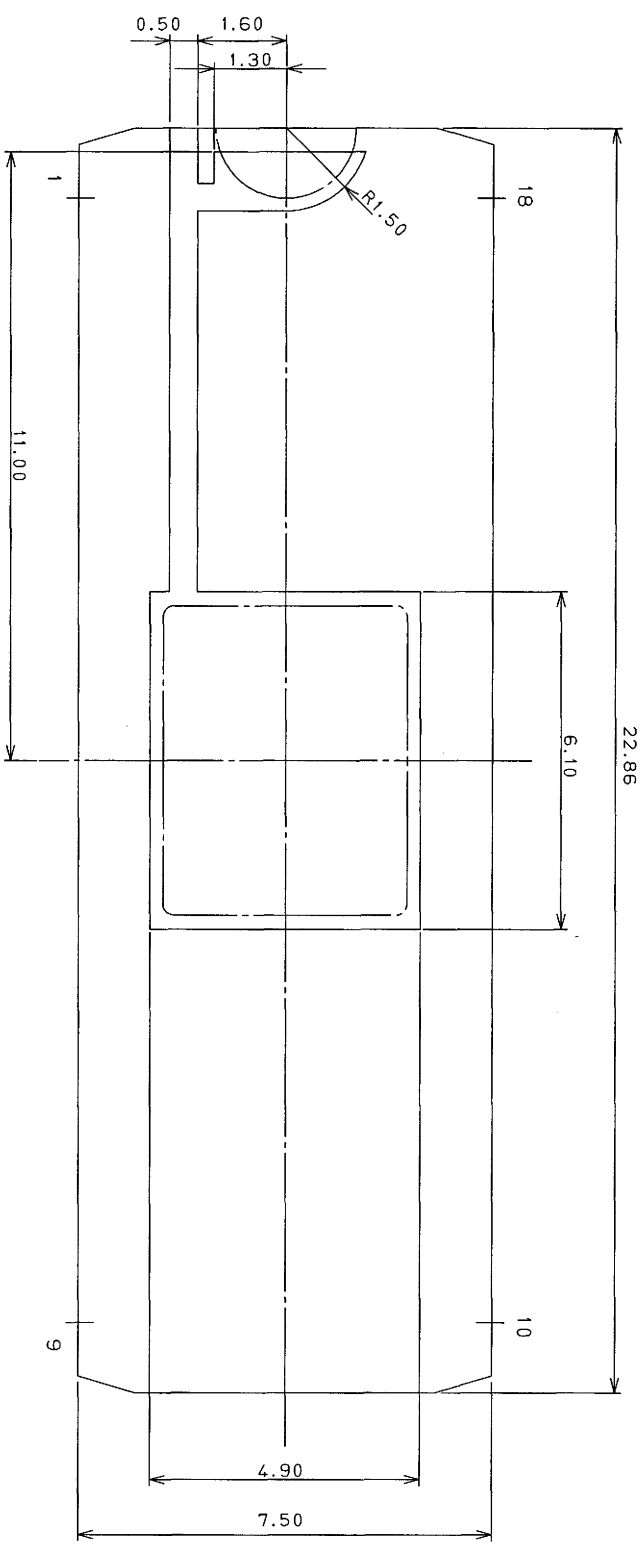

MODIFIED	DWG NO.

DESCRIPTION	DRAWN	CHECKED	APPROVED	UNIT	SCALE	DWG NO.	PART NO.	SHEET	OF
NEW DRAWING	M. UNO	M. UNO	S. NISHIMURA	MM	1:1	P-IDK-245A-2			
FILE NAME	pd245gc-e								
CUSTOMER	NTK								
TITLE	NGK SPARK PLUG CO., LTD.								
	D/A PATTERN								

1 2 3 4 5 6 7 8 9 10 11