NTK TECHNICAL CERAMICS

<BO- 8432> 2/4

<BO- 8432> 3/4

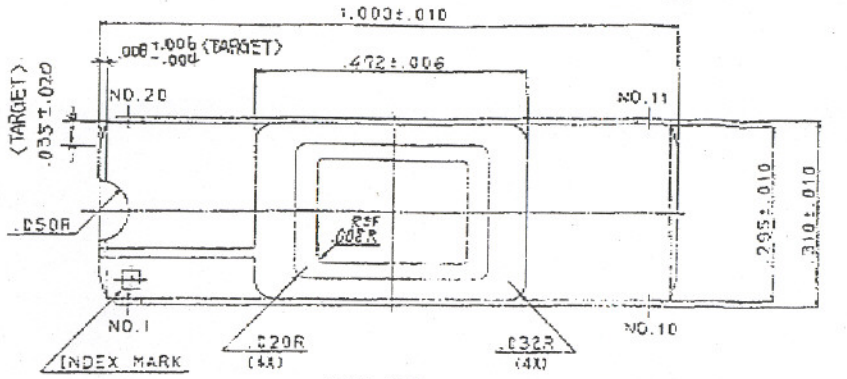

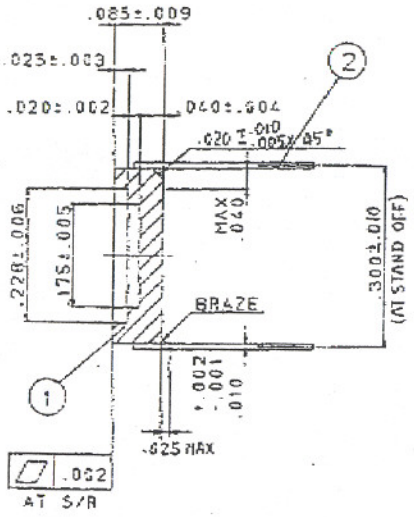

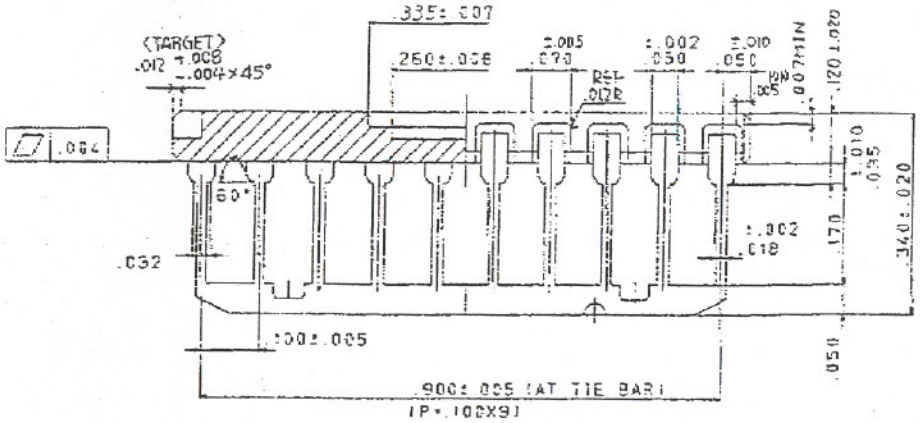

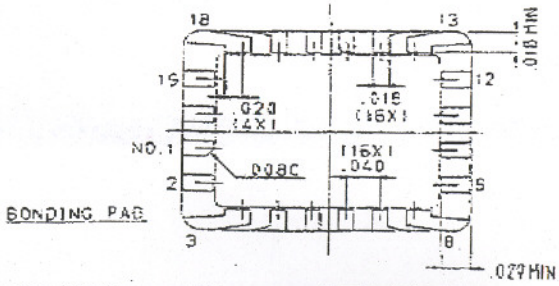

DRAWING FOR APPROVAL
APPROVED BY
NGK TECHNICAL CERAMIC

NGK TECHNICAL CERAMIC DIVISION DEC 20 '95 NGK SPARK PLUG CO.,LTD

NOTES: 1. GOLD PLATE 60~200μ INCHES OVER 100~350μ INCHES NICKEL.

2. NO LEAD TO BE ELECTRICALLY CONNECTED TO THE DIE ATTACH PAD. SEAL RING ISOLATED.

3. (OLD SPRAGUE) ALLEGRO SPEC 830002 SHALL APPLY.

4. D/A PAD FLATNESS .35 MIL MAX.

No.	Material	Description
2	LEAD	ALLOY42
1	CERAMIC	BLACK ALUMINA

Rev.	Description	Date
B	RE DRAWING	DEC-16-91
	WAS -6268A (NGS Dwg.No. IDK20F1-6268AA) 60~225μ" (NGS Au THK 60~300μ") WAS	
A		OCT-2-'91
⌀	NEW DRAWING	JULY -4-88

UNLESS OTHERWISE SPECIFIED TOLERANCES: ± 1%
N. L. T. 2 DECIMALS .XX ±.01
3 DECIMALS .XXX ±.005

CUSTOMER ALLEGRO (OLD SPRAGUE)

DWG NO. 52 0914X 5007A REV'K

DRAWN HIRAMATSU
CHECKED T.MIWA
APPROVED
UNIT INCH
SCALE 5/1

NTK TECHNICAL CERAMICS
NGK SPARK PLUG CO., LTD

TITLE 20LD S/B PKG

DWG NO. IDK20F1-6268AA

SIZE A-3