
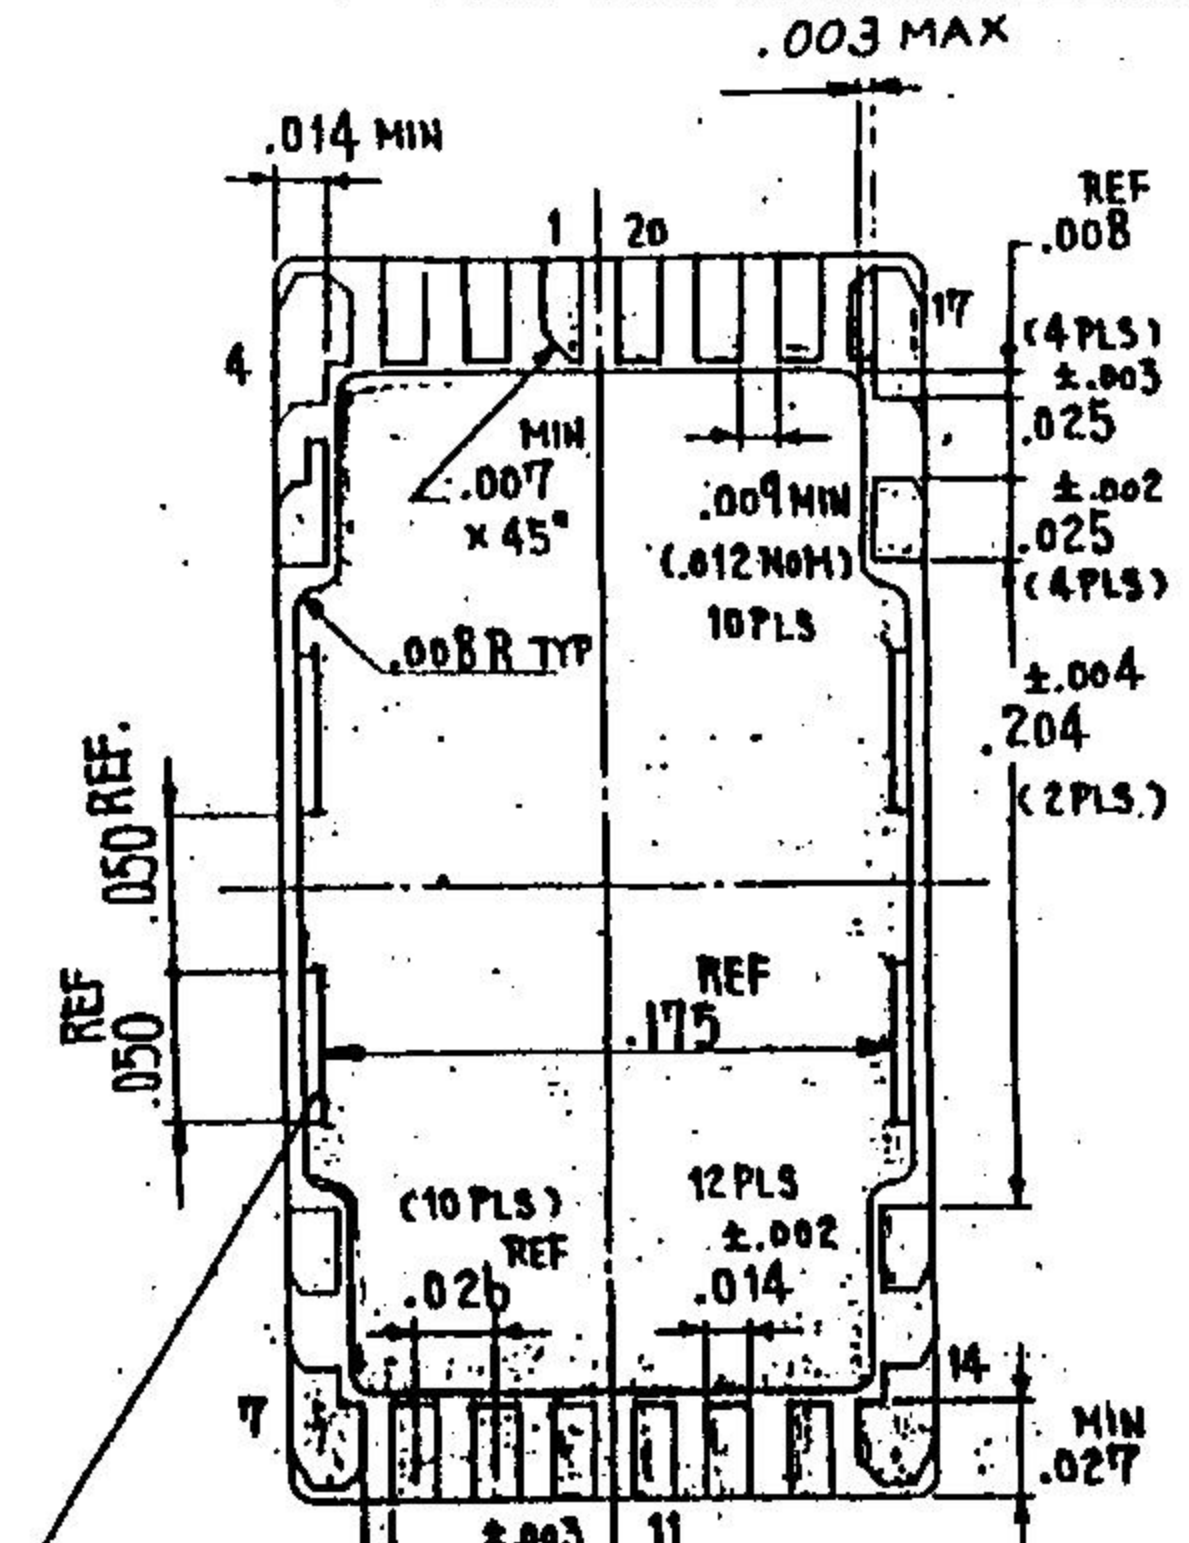
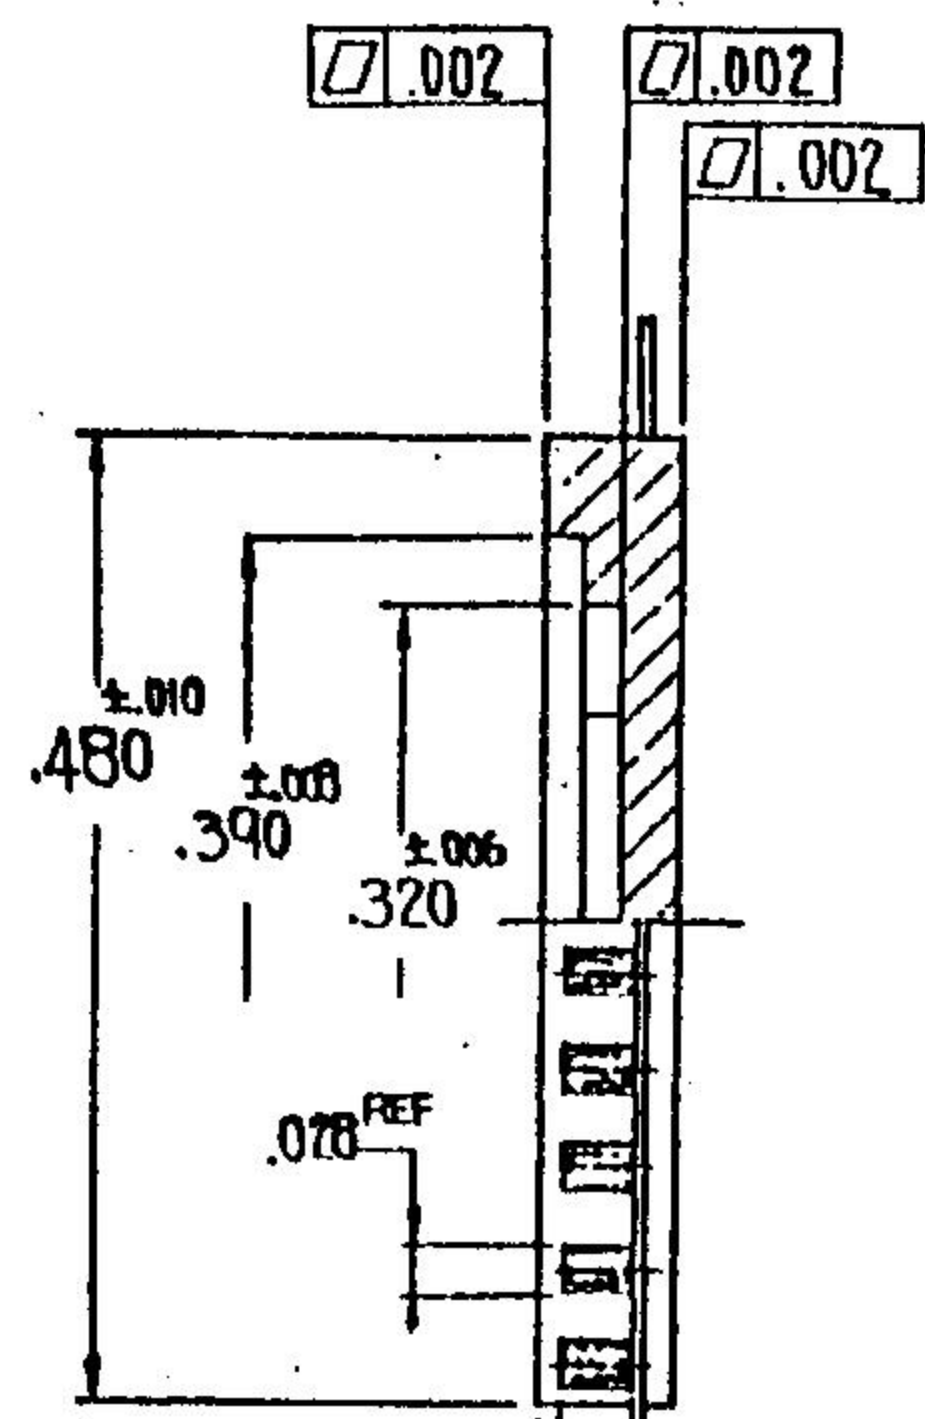


NWS

LATEST REVISION'S DIScription


A CHANGE TOLERANCES.  
 .295 ± .005 WAS .295 ± .008  
 .005 ± .001 WAS .005 ± .002

B CHG L/F

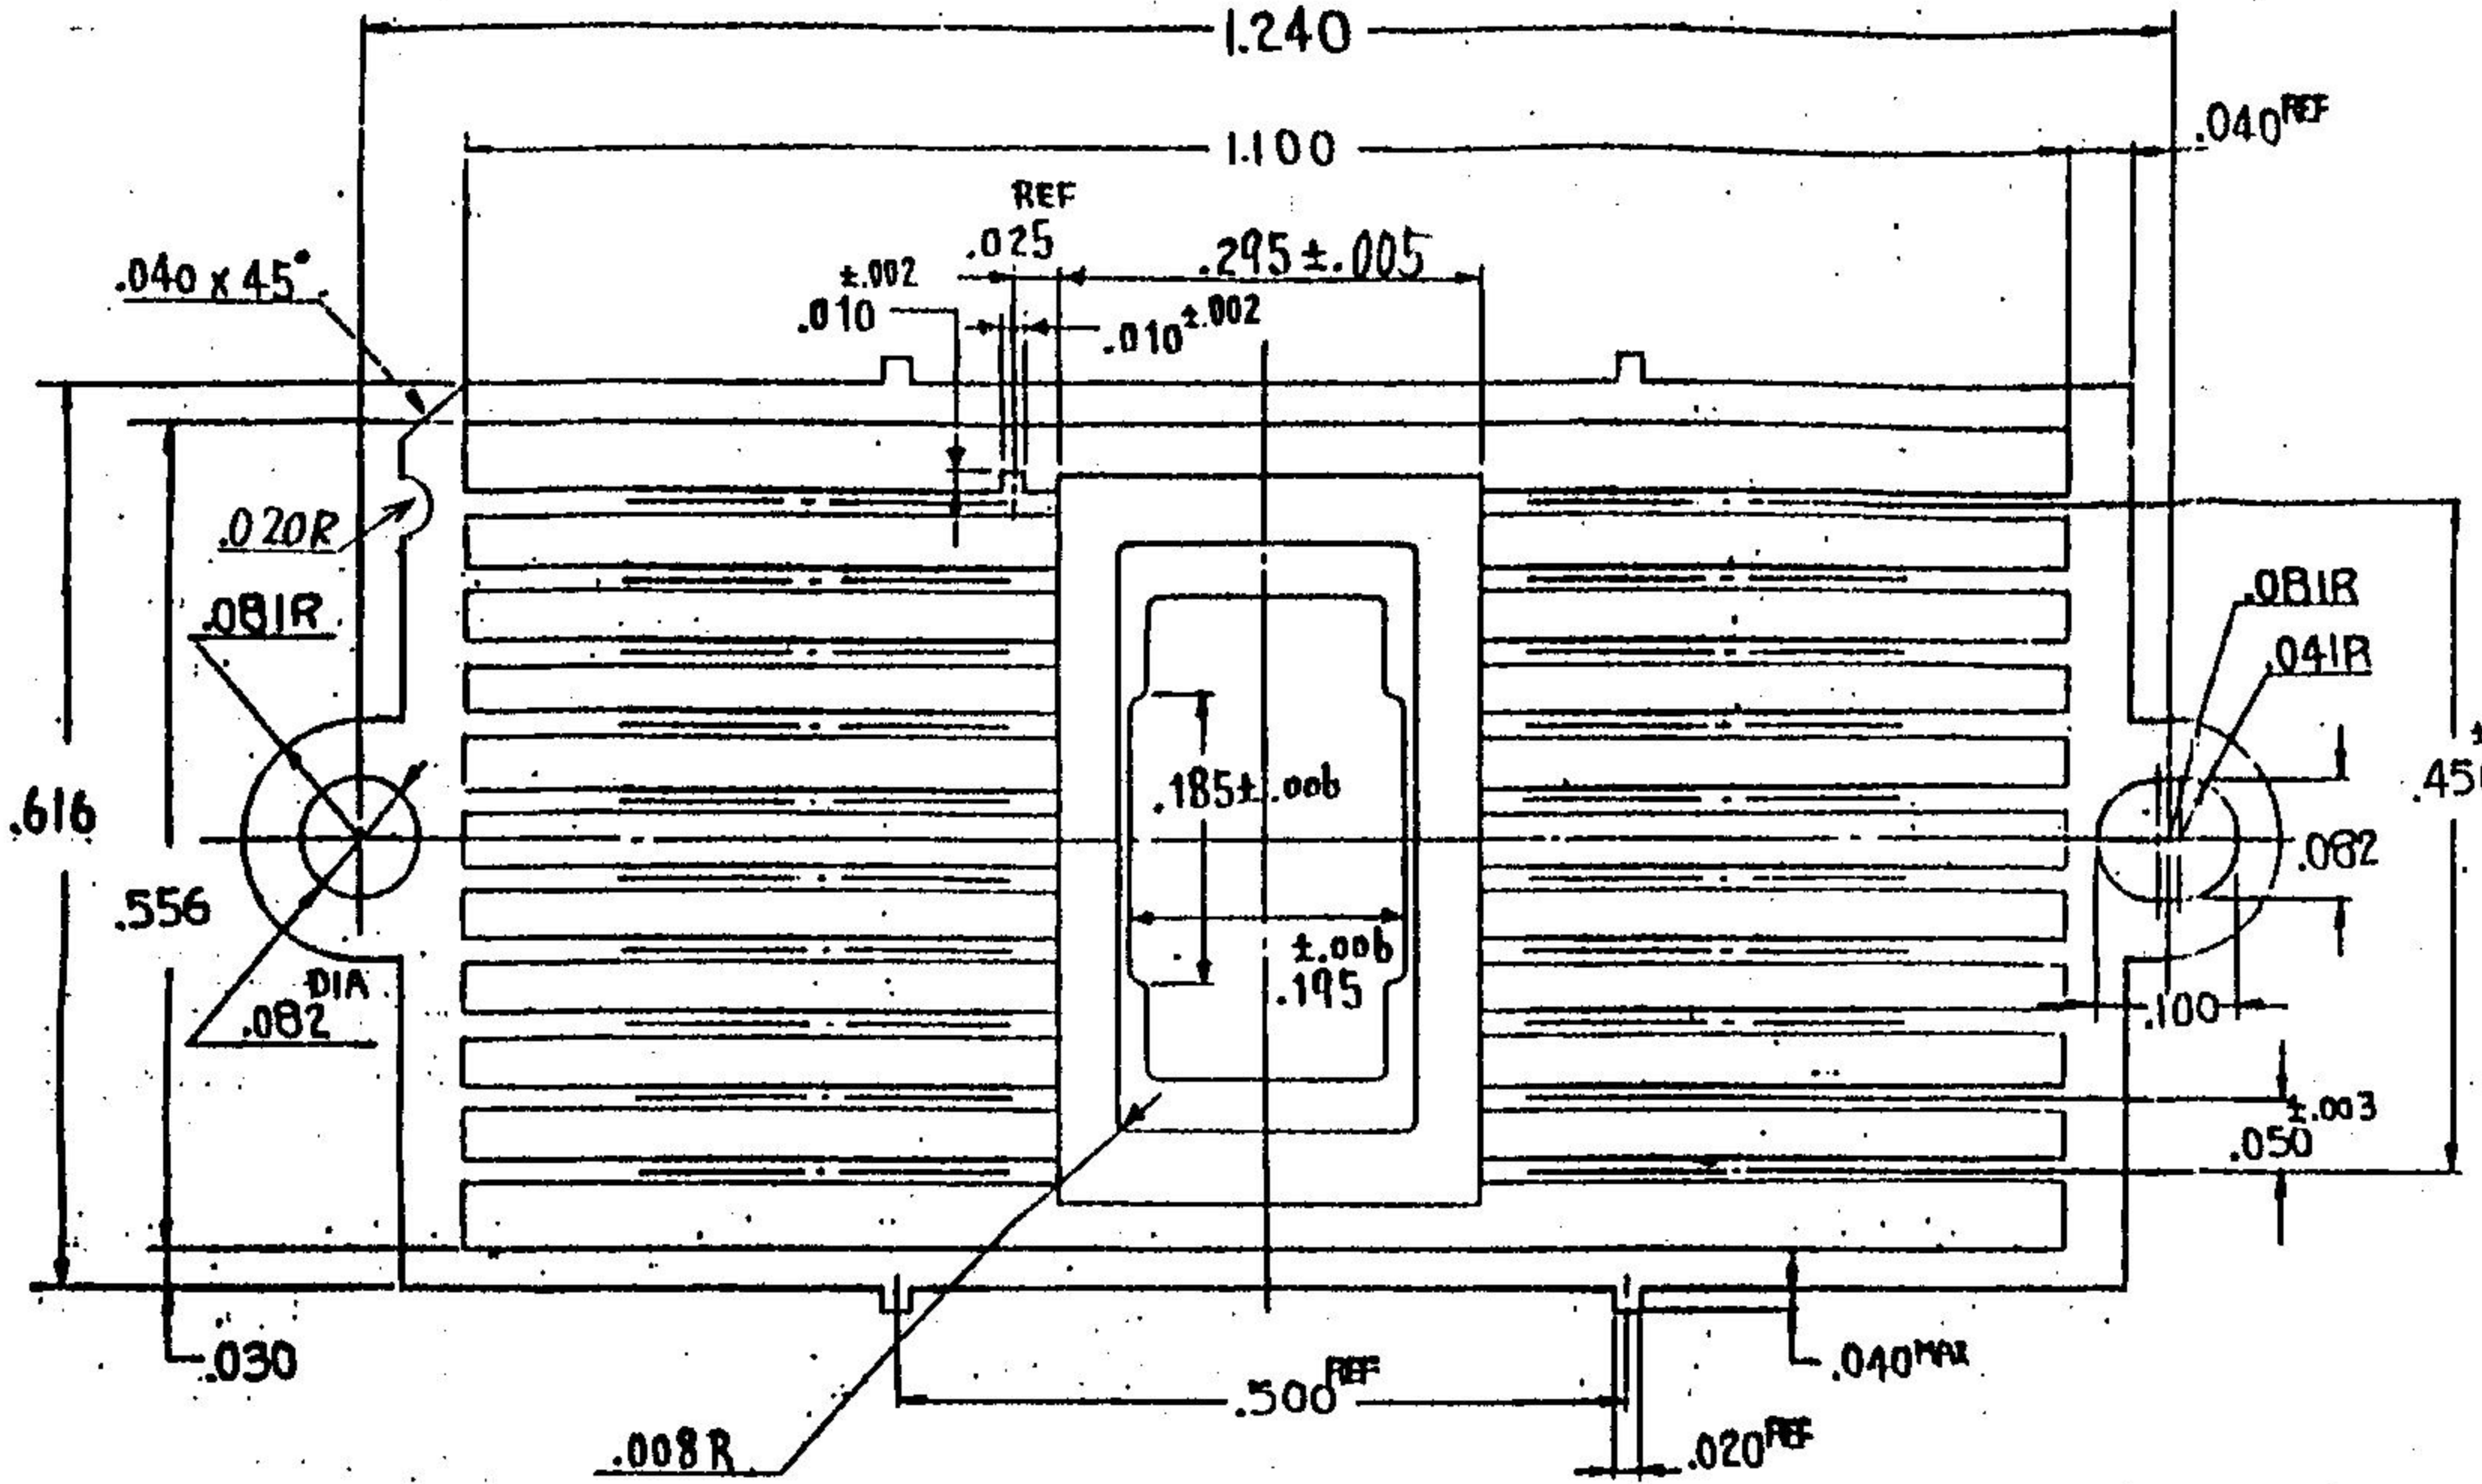


NO METALLIZATION (4X)

DETAIL BONDING PADS.

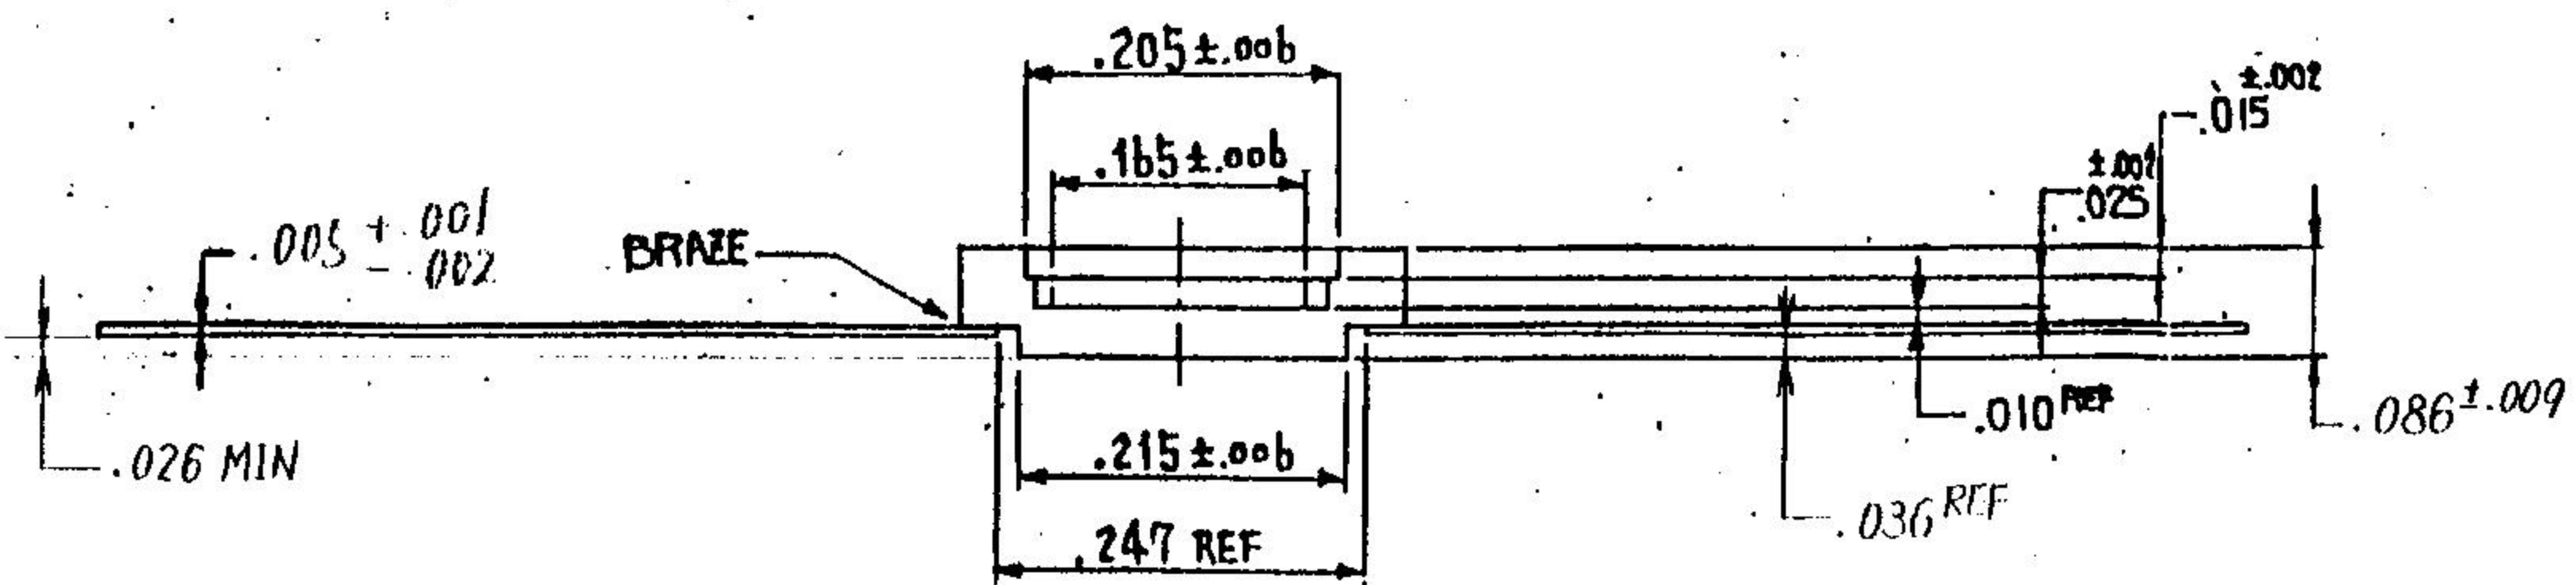

- NOTE: 1. PLATING: NICKEL 80μ INCHES MIN + GOLD 60μ INCHES MIN.  
 2. NO LEAD TO BE ELECTRICALLY CONNECTED TO THE DIE ATTACH PAD. SEAL RING ISOLATED.  
 3. LEAD RESISTANCE 500 mΩ MAX.

OPEN-TOOLED

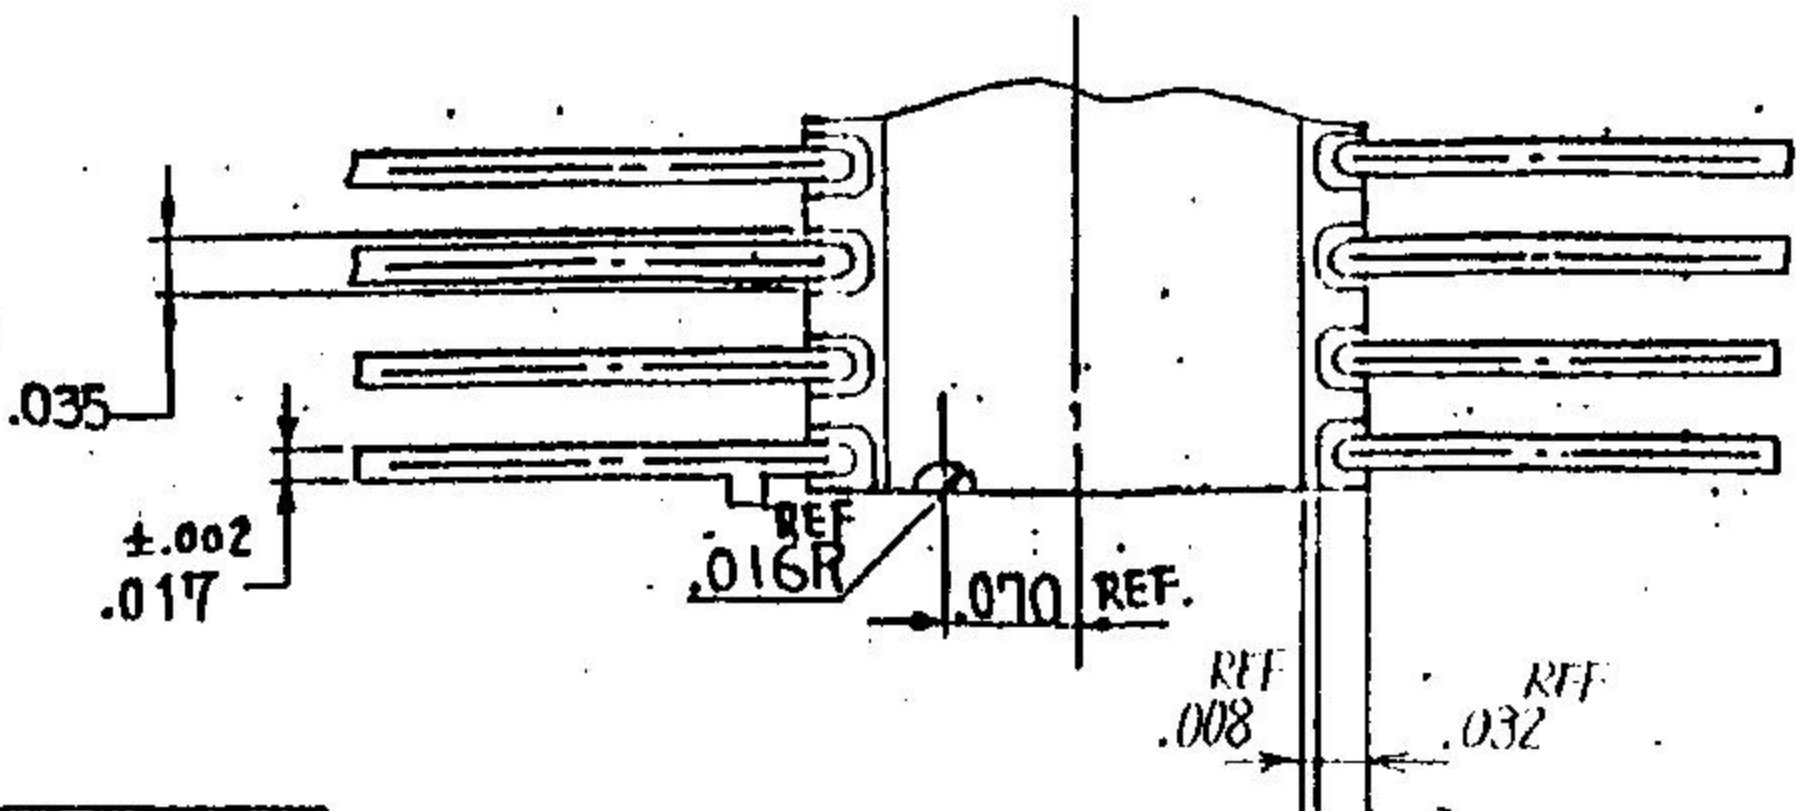

3				B	RE DRAWING	11-26
2	LEAD	ALLOY 42		A	RE DRAWING	8-27
1	CERAMIC	BLACK ALUMINA		φ	NEW DRAWING	MAY-12-1990
Rev	Name	Material	Description	Rev	Description	Date
UNLESS OTHERWISE SPECIFIED TOLERANCES: ± 1%			DRAWN	NWS TECHNICAL CERAMICS		
N. L. T. 2 DECIMALS. XX ± .01			CHECKED	NOK SPARK PLUG CO., LTD		
5 DECIMALS. XXX ± .008			APPROVED	TITLE		
CUSTOMER			UNIT	20 LEAD FLAT PACKAGE		
DWG			SCALE	DWG NO.		
				IFK20F1-2187A		
				SIZE		
				A-2		
				(0)		

MODIFIED DWG No.