
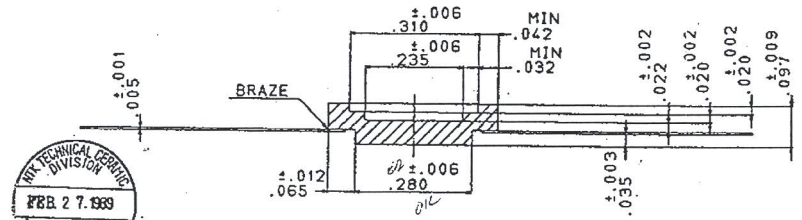
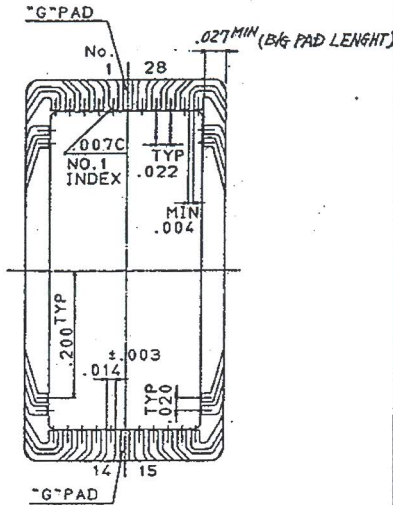
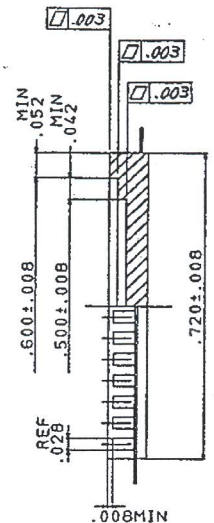



NTK

TECHNICAL CERAMICS

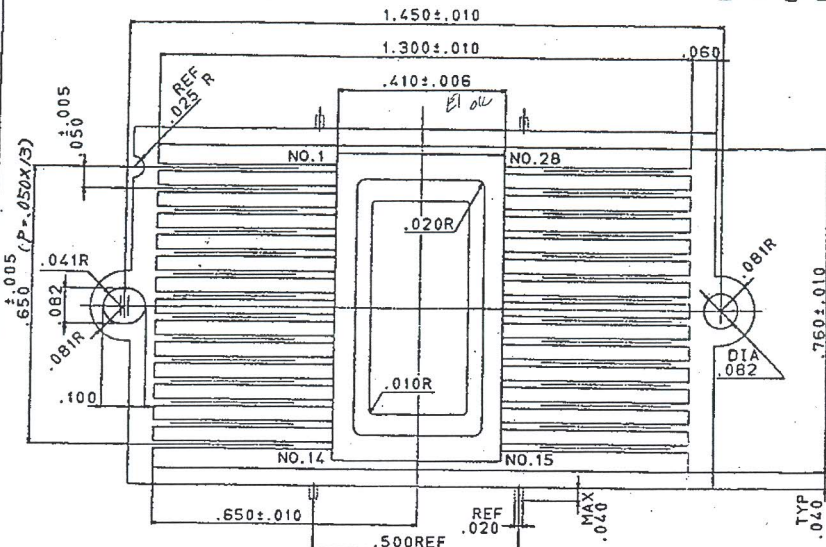

NTK TECHNICAL CERAMICS DIVISION
FEB. 27, 1989
NGK SPARK PLUG CO., LTD.

- NOTES: 1. GOLD PLATE 100 μ INCHES MIN OVER 80 μ INCHES MIN NICKEL.
 2. "G" PAD TO BE CONNECTED TO THE DIE ATTACH PAD. SEAL RING ISOLATED.
 3. LEAD RESISTANCE: 300m Ω MAX.
 4. SEAL RING AND DIE ATTACH PAD TO BE METALIZED.
 5. MICRON SPEC #321701 SHALL APPLY.

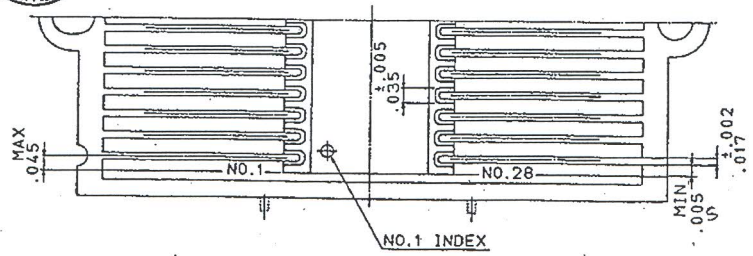

LEAD		ALLOY 42			
CERAMIC		BLACK ALUMINA			
Item	Name	Material	Description	Rev.	Description
UNLESS OTHERWISE SPECIFIED TOLERANCES: ± 1%			DRAWN		
N. L. T. 2 DECIMALS. XX ± .01			CHECKED	H. OHIKE	
8 DECIMALS. XXX ± .005			APPROVED	J. W.	
CUSTOMER	DWG NO.		UNIT	DWG NO.	
	SCALE		INCH		
					S. HASEGAWA FEB. -27 '89
					NEW DRAWING
					NTK TECHNICAL CERAMICS NGK SPARK PLUG CO., LTD
					TITLE
					28 LD FLAT PKG
					IFK28F1-2114A
					SIZE A-3