


OPEN TOOL

- NOTES:
1. GOLD PLATE 1.52~3.81μm OVER 2.54~6.35μm NICKEL. [100~250μ INCHES]
 2. D/A TO BE ELECTRICALLY CONNECTED GND PAD "A"&"B". S/R ISOLATED.
 3. LEAD RESISTANCE:800mΩ MAX
 4. NTK SPEC YS-1010 SHALL APLY.

③	STAND OFF PIN	ALLOY42			
②	PIN	ALLOY42			
①	CERAMIC	BLACK ALUMINA			
Item Name	Material	Description	Rev.	Description	Date
UNLESS OTHERWISE SPECIFIED TOLERANCES: ± 1%					
N. L. T. 1 DECIMALS X.X ±0.25					
CUSTOMER			APPROVED		
DWG NO.		UNIT MM [INCH]	DWG NO.		
		SCALE			

MODIFIED DWG NO.

NEW DRAWING JAN-31-1990
 NTK NGK SPARK PLUG CO., LTD.
 TITLE 28 PIN GRID ARRAY
 IPK28F1-8564A

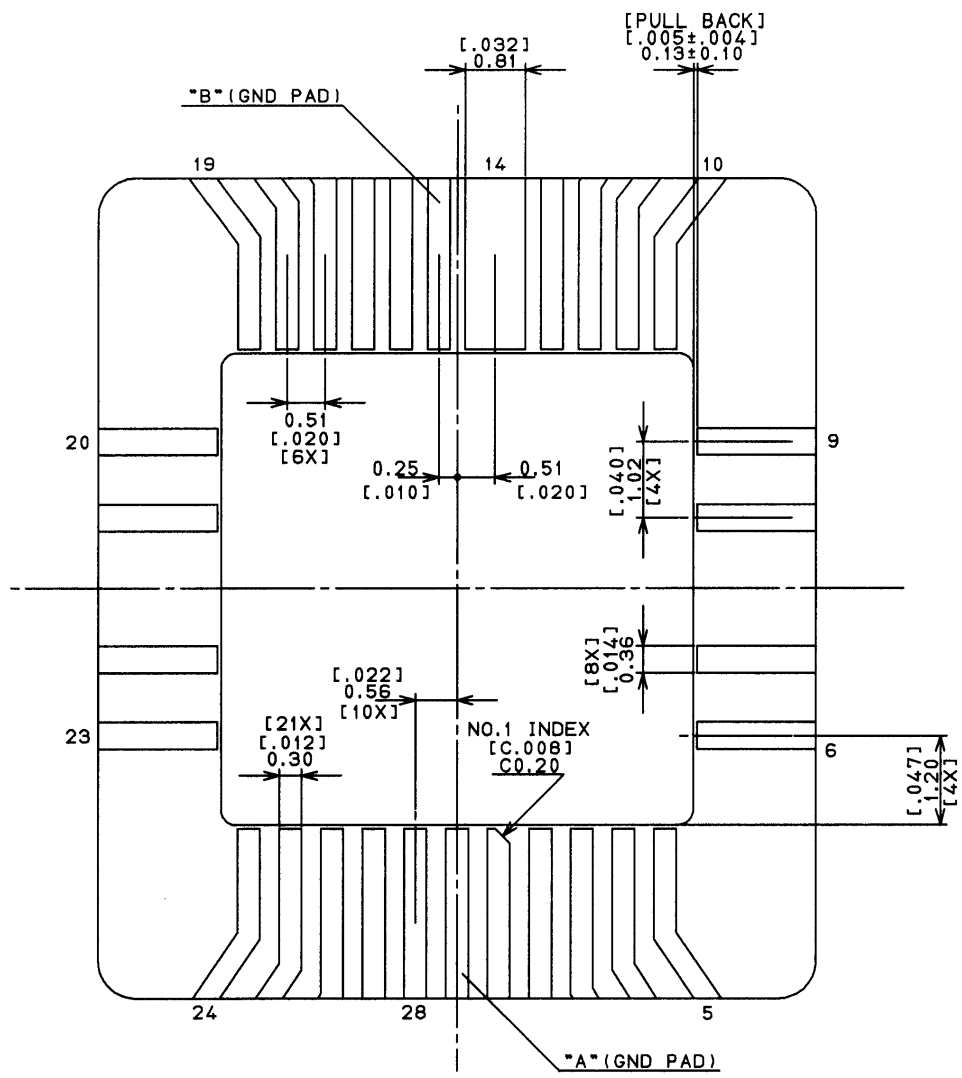

OPEN TOOL

	φ NEW DRAWING	JAN-31-1990
Rev.	Description	Date

UNLESS OTHERWISE SPECIFIED TOLERANCES: ± 1 % N. L. T. 1 DECIMALS X, Y ± 0.25 2 DECIMALS X, XX ± 0.13	DRAWN C. MATSUURA CHECKED N. NAKAYAMA APPROVED T. NOMURA	NTK NGK SPARK PLUG CO., LTD. TITLE B/G PADS DETAIL
CUSTOMER DWG NO.	UNIT MM [INCH] SCALE /	DWG NO. IPK28F1-8564A

MODIFIED DWG NO. _____