

TK

1100870120


LATEST REVISION'S DESCRIPTION

B CHG NOTE: 1-6

07

ϕ .002 T.I.R

\pm .002
.020

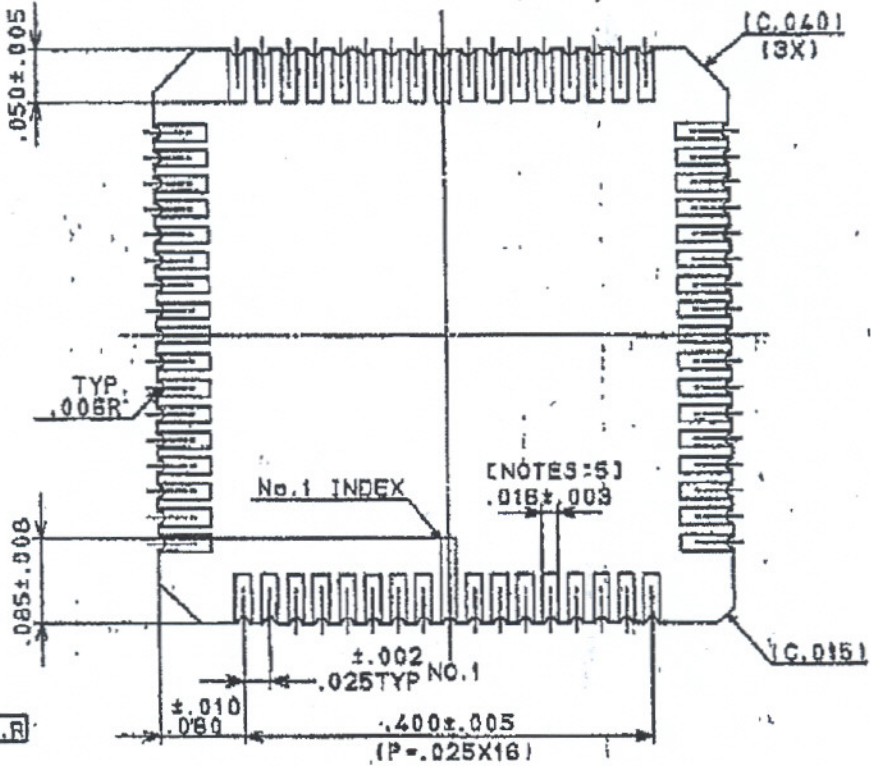


ϕ .002 T.I.R



DETAIL CASTELLATION

P 3/3

3				B	RE DRAWING	MAY-14 -1988
2				A	RE DRAWING	APR-18 -1988
1	CERAMIC	BLACK ALUMINA		ϕ	NEW DRAWING	APR-12 -1988
Item	N & N's	Material	Description	Rev.	Description	Date
UNLESS OTHERWISE SPECIFIED TOLERANCES: \pm .005			DRAWN	N.KAWAI		
N. L. T. 2 DECIMALS: .XX \pm .01			CHECKED	N.T.S. TECHNICAL CERAMICS		
CUSTOMER			APPROVED	HOK SPARK PLUG CO., LTD.		
Dwg No.			UNIT	TITLE		
			SCALE	68LEAD LESS CHIP CARRIER		
				DWG NO.	IRK68F1-258C	
				SIZE	A-3 (C)	

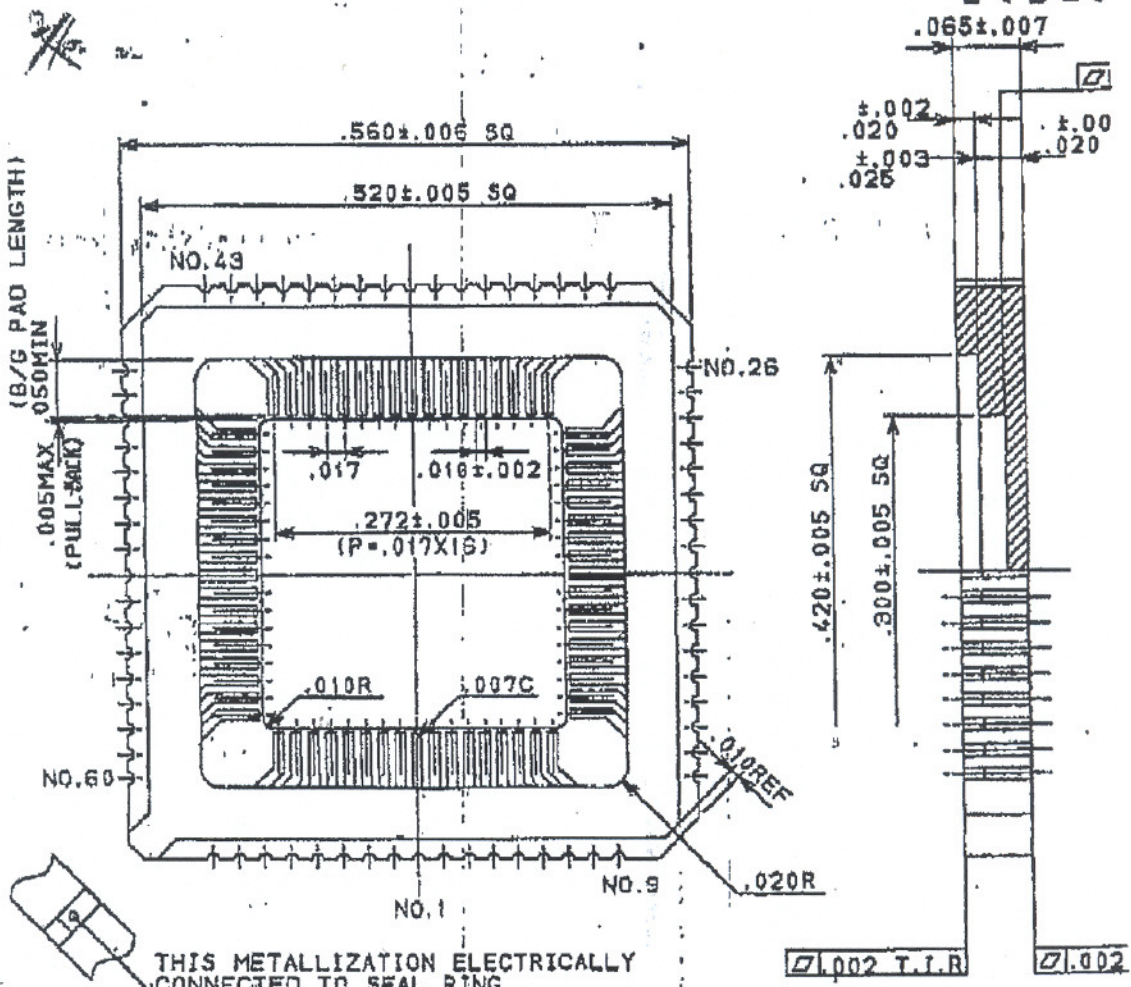

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. PART SHALL CONFORM TO IDT SPEC: MSC-0100.
2. PLATING: 60μ MIN GOLD OVER 100μ MIN NICKEL.
3. SEAL RING AND DIE ATTACH PAD TO BE METALLIZED.
4. SEAL RING AND DIE ATTACH PAD TO BE ELECTRICALLY ISOLATED (A.L.O TYPE)
5. EXCEPT AROUND THE CASTELLATION.
6. LEAD RESISTANCE: 200mΩ MAX (ALL LEADS).

MODIFIED
DWG NO.