


DETAIL - A

- NOTES :
1. PLATING THICKNESS TO BE PER CUSTOMER'S SPECIFICATION.
  2. SEAL AREA TO BE METALLIZED.
  3. DIE ATTACH AREA TO BE METALLIZED.
  4. LEAD RESISTANCE : 0.35Ω MAX.

PART NO.	ID MARK	LEAD TIDE DOWN
01		NIL
02		NO.1 ONLY
03		NO.14 ONLY

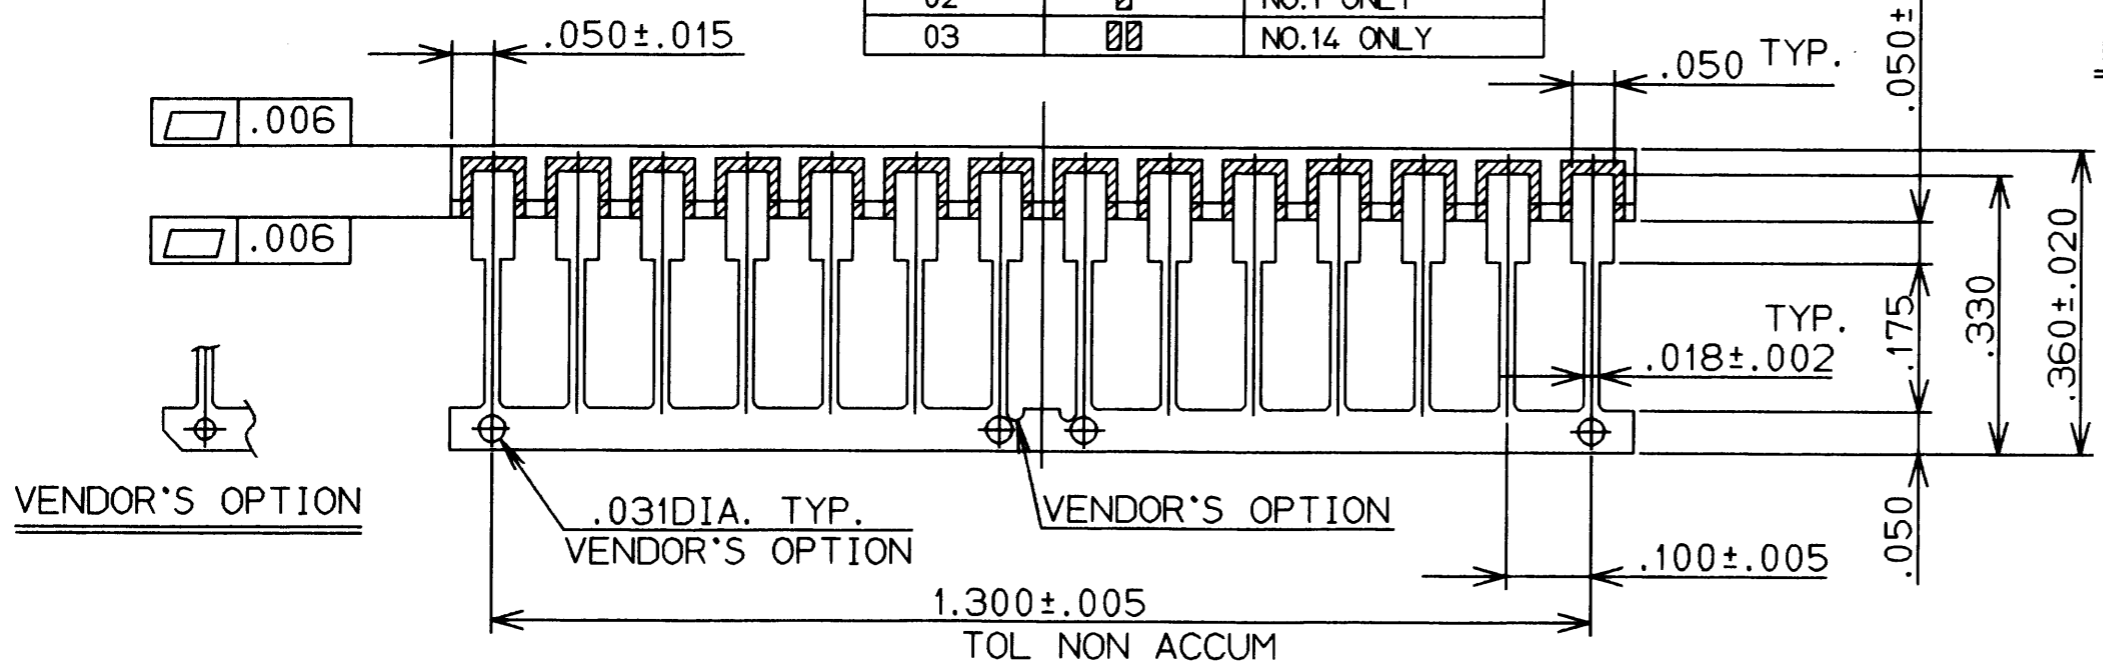

SB028I368-3	S=0	D=14
SB028I368-2	S=0	D=1
SB028I368-1	S=0	D=0

MODIFICATION						NAME	TOLERANCE	DRAWN	CHECKED	APPROVED	DATE
						28 LEAD SIDE BRAZED PACKAGE	UNLESS OTHERWISE SPECIFIED	S.F	T.C	K.M	SEP.05.'78
					SCALE 4/1	MATERIAL AS INDICATED	±.005				
							THIRD ANGLE PROJECTION				
	REDRAWN	JUN.23.'92	S.F	T.C/T.A	K.M		KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO.		SHEET	
	CHANGED	DATE	DRAWN	CHECKED	APPROVED			KD-78368-E	1/2		

