


DETAIL-A

- NOTE'S.
1. PLATING THICKNESS TO BE PER CUSTOMER'S SPECIFICATION.
 2. SEAL AREA TO BE METALLIZED.
 3. DIE ATTACH AREA TO BE NOT METALLIZED.
 4. SEAL RING TO BE FLOATING FROM ANY PINS.

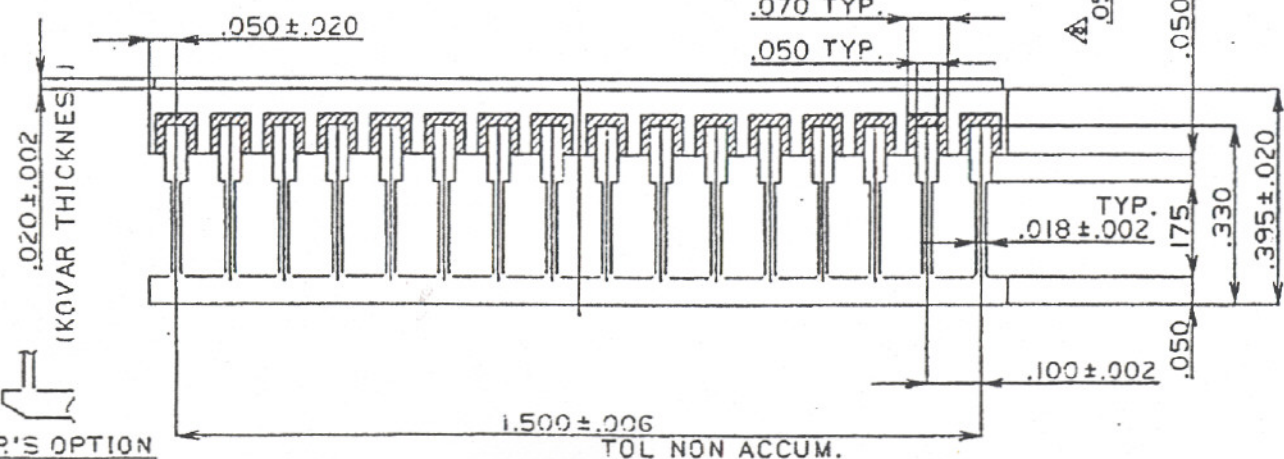

VENDOR'S OPTION

TOL NON ACCUM.

MODIFICATIONS	CHANGED: .045 → .050	JUL 23 '86	J. [Signature]			
	CHANGED: ±.020 → ±.005	MAY 12 '86	J. [Signature]			
	CHANGE	DATE	DRAWN	CHECKED	APPROVED	

NAME	32 LEAD HYBRID PACKAGE
SCALE	4 : 1
MATERIAL	AS INDICATED

TOLERANCES:	UNLESS OTHERWISE SPECIFIED
	±10% NLT. ±.005

SK=0	HB032R177-1	D=N
DRAWN	CHECKED	
APPROVED	DATE	
		FEB. 14 '85