


MODIFICATION	DATE	DRAWN	CHECKED	APPROVED
△ REDRAWN : CONVERTED CAD DATA. CHANGED	AUG.09.'00	H.K	H.TA/S.NI	H.SA

NAME 64 LEAD SIDE BRAZED PACKAGE	TOLERANCE UNLESS OTHERWISE SPECIFIED ±.005 THIRD ANGLE PROJECTION
SCALE 3 / 1	MATERIAL AS INDICATED
KYOCERA CORPORATION KYOTO JAPAN	

SB064N665-1 S=0 D=0			
DRAWN	CHECKED	APPROVED	DATE
M.M	K.M	<i>H. Kawano</i>	NOV.9.'83
DRAWING NO. KD-S83665-A		SHEET 1 / 2	

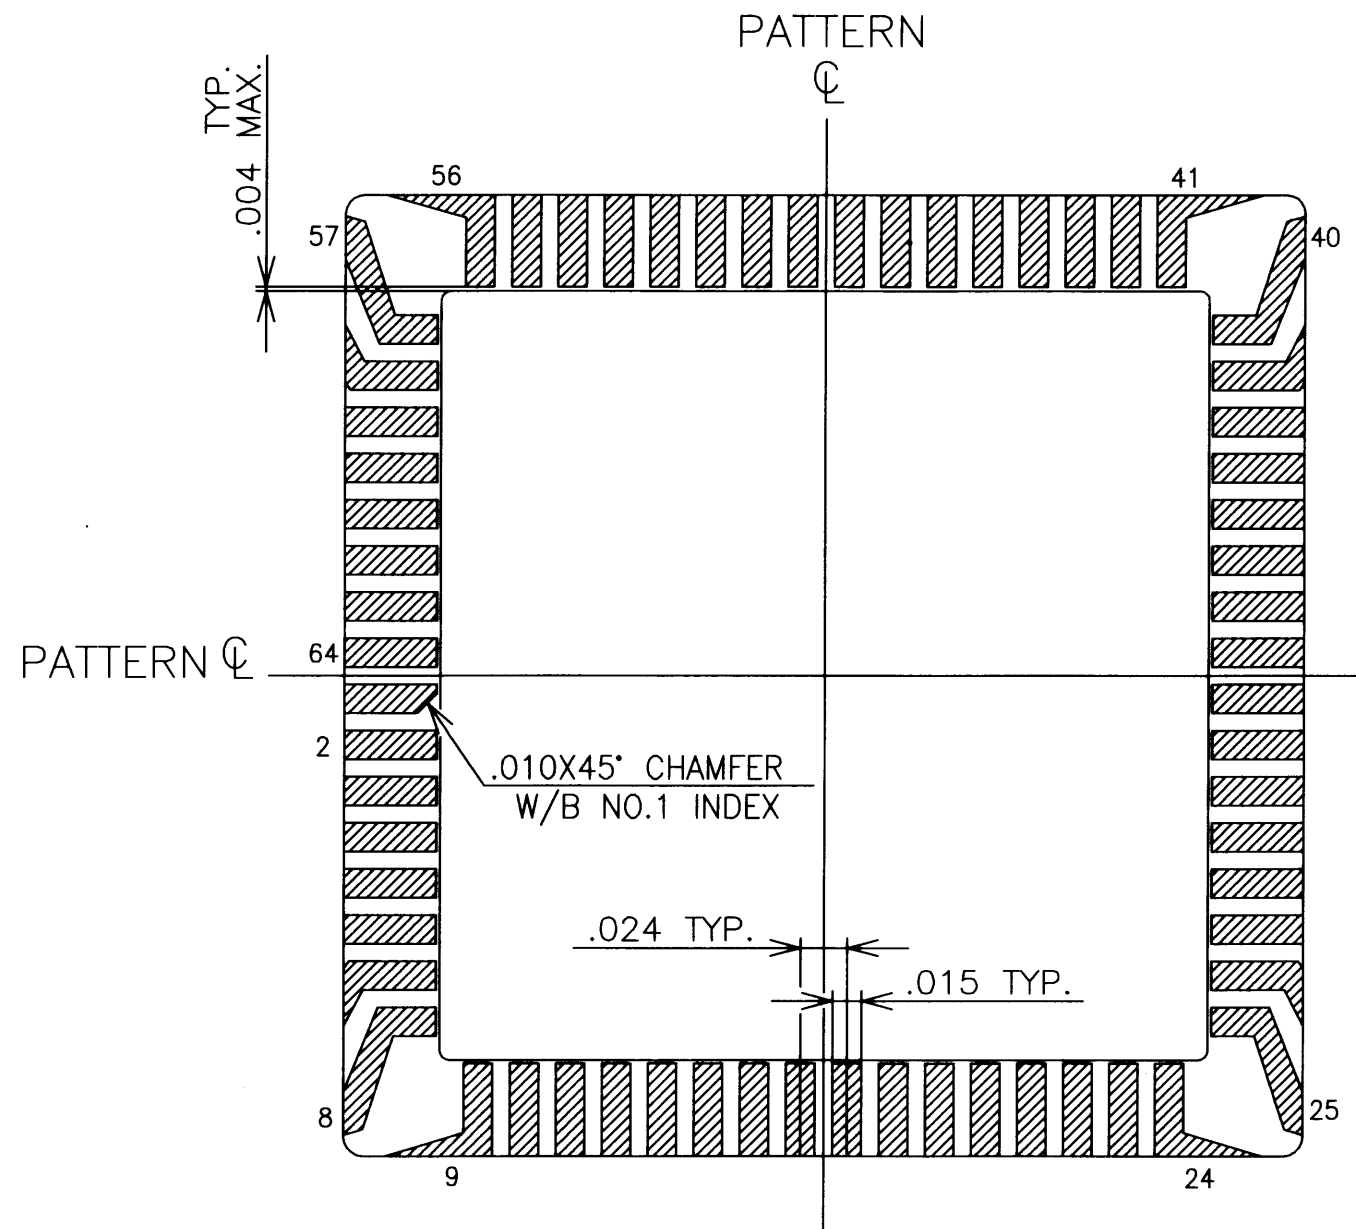

BONDING PATTERN

NOTES:

1. PLATING THICKNESS TO BE PER CUSTOMER'S SPECIFICATION.
2. SEAL AREA TO BE METALLIZED.
3. DIE ATTACH AREA TO BE METALLIZED.
4. SEAL RING AND DIE ATTACH PAD TO BE FLOATING FROM ANY PINS.
5. LEAD RESISTANCE : 0.35 OHM MAX.

MODIFICATION						NAME 64 LEAD SIDE BRAZED PACKAGE	TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN M.M	CHECKED K.M	APPROVED	DATE NOV.10.'83
						SCALE 10 / 1	MATERIAL				
										THIRD ANGLE PROJECTION	
	REDRAWN : CONVERTED CAD DATA. CHANGED	AUG.09.'00	H.K	H.TA/S.NI	H.SA		KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO.		SHEET	
		DATE	DRAWN	CHECKED	APPROVED			KD-S83665-A		2 / 2	