SHALLOW-C

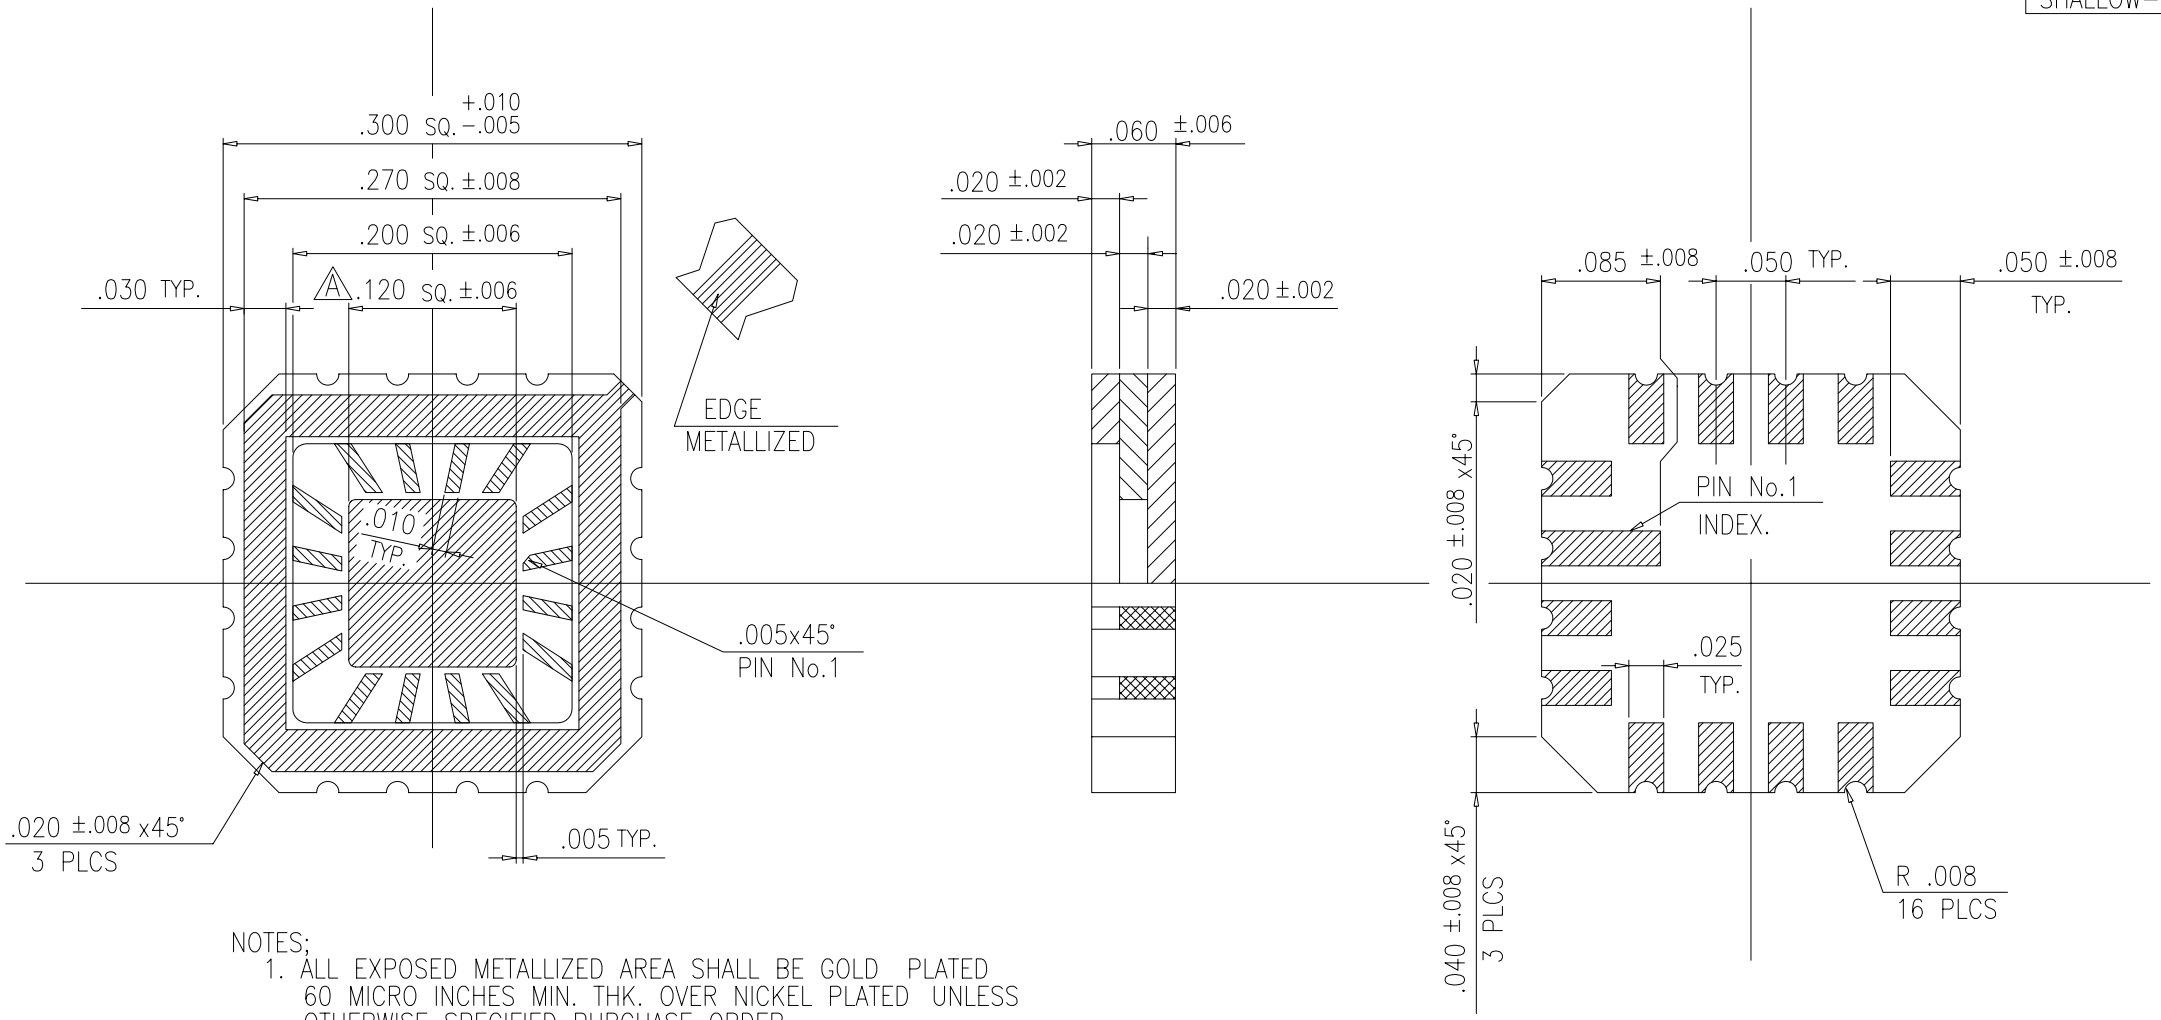

NOTES;

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCHES MIN. THK. OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
2. SEAL RING FLATNESS SHALL BE .003 IN/IN N.L.T. .002 T.I.R.
3. SEAL RING AND DIE ATTACH PAD ARE NOT GROUNDED TO A LEAD.

MODIFICATIONS					
A	REMOVED PART NUMBER.	SEP.16.'03	T.Y	K.Y / UE.	M.K
	CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME 16 LCC(.120 SQ. CAV.) A

SCALE 10/1

MATERIAL KYOCERA A-440

TOLERANCES: UNLESS OTHERWISE SPECIFIED ± .005 THIRD ANGLE PROJECTION

KYOCERA

KYOCERA CORPORATION KYOTO JAPAN

A 10-31-210-577 TM-16CL

DRAWN	CHECKED	APPROVED	DATE
N.U	S.M/T.O		'79.8.7

DRAWING NO. PB-92263-A

SHEET /