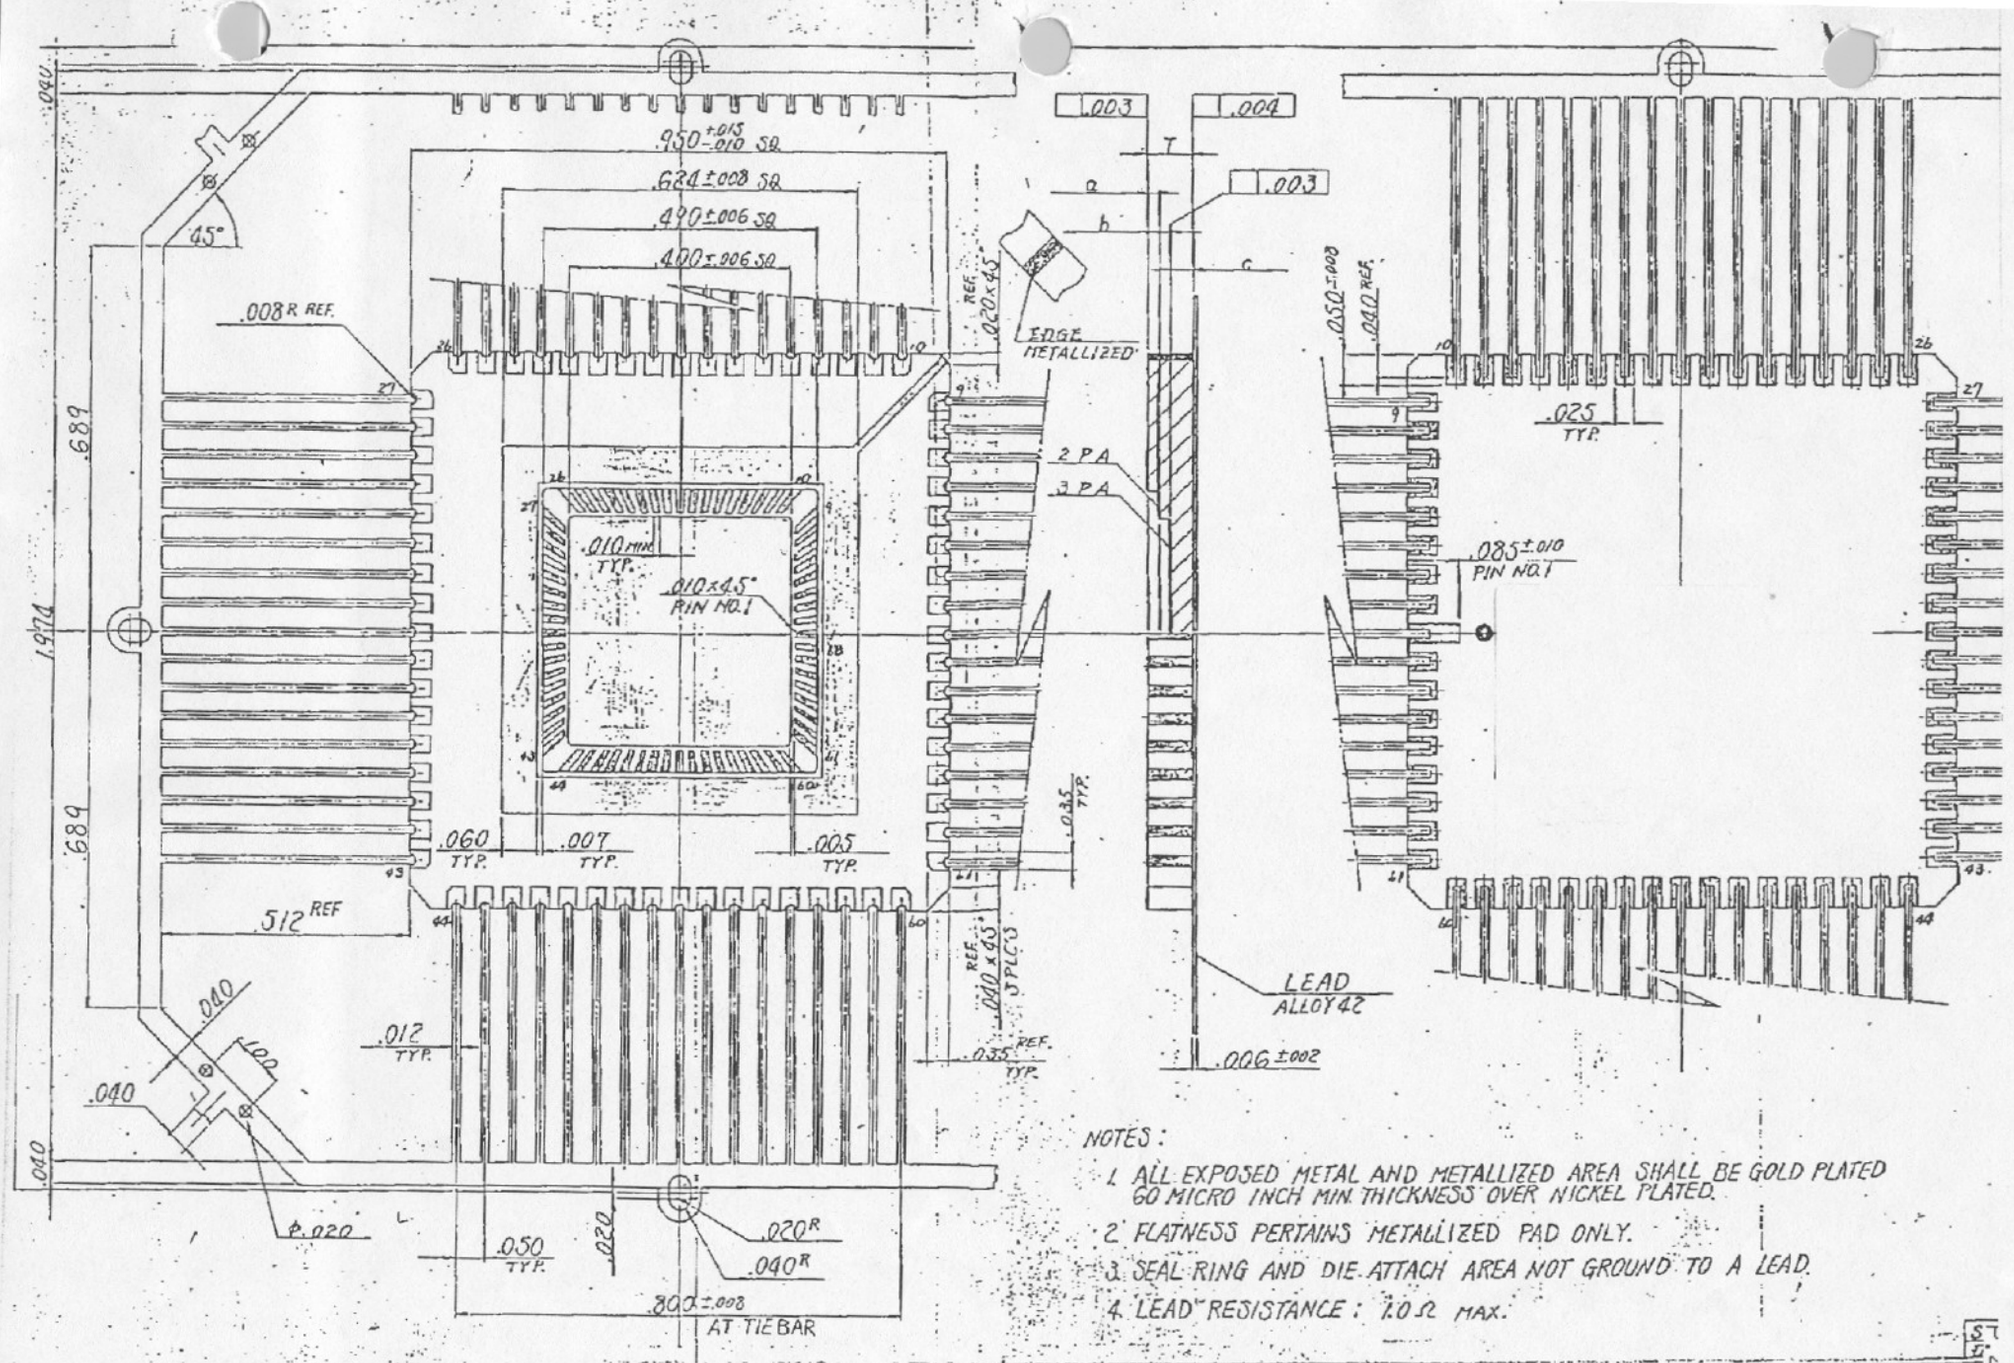

NOTES:

1. ALL EXPOSED METAL AND METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCH MIN. THICKNESS OVER NICKEL PLATED.
2. FLATNESS PERTAINS METALLIZED PAD ONLY.
3. SEAL RING AND DIE ATTACH AREA NOT GROUND TO A LEAD.
4. LEAD RESISTANCE: 1.0 Ω MAX.

PART NO	a	b	c	T	
01	.020	.020	.040	.080 ±.008	
02	.025	.025	.050	.100 ±.010	

MODIFICATIONS

CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME: 68 LEAD FLAT PACK

SCALE: 6/1

MATERIAL: KYOCERA A-440

TOLERANCES: UNLESS OTHERWISE SPECIFIED ± 1 % N.L.T. ±.005

DRAWN: T. Hoshida

APPROVED: [signature]

DATE: 1-29-8

KYOCERA CORPORATION KYOTO JAPAN

DWG No. PB-F86056

PB-02615-A MOD