4/4

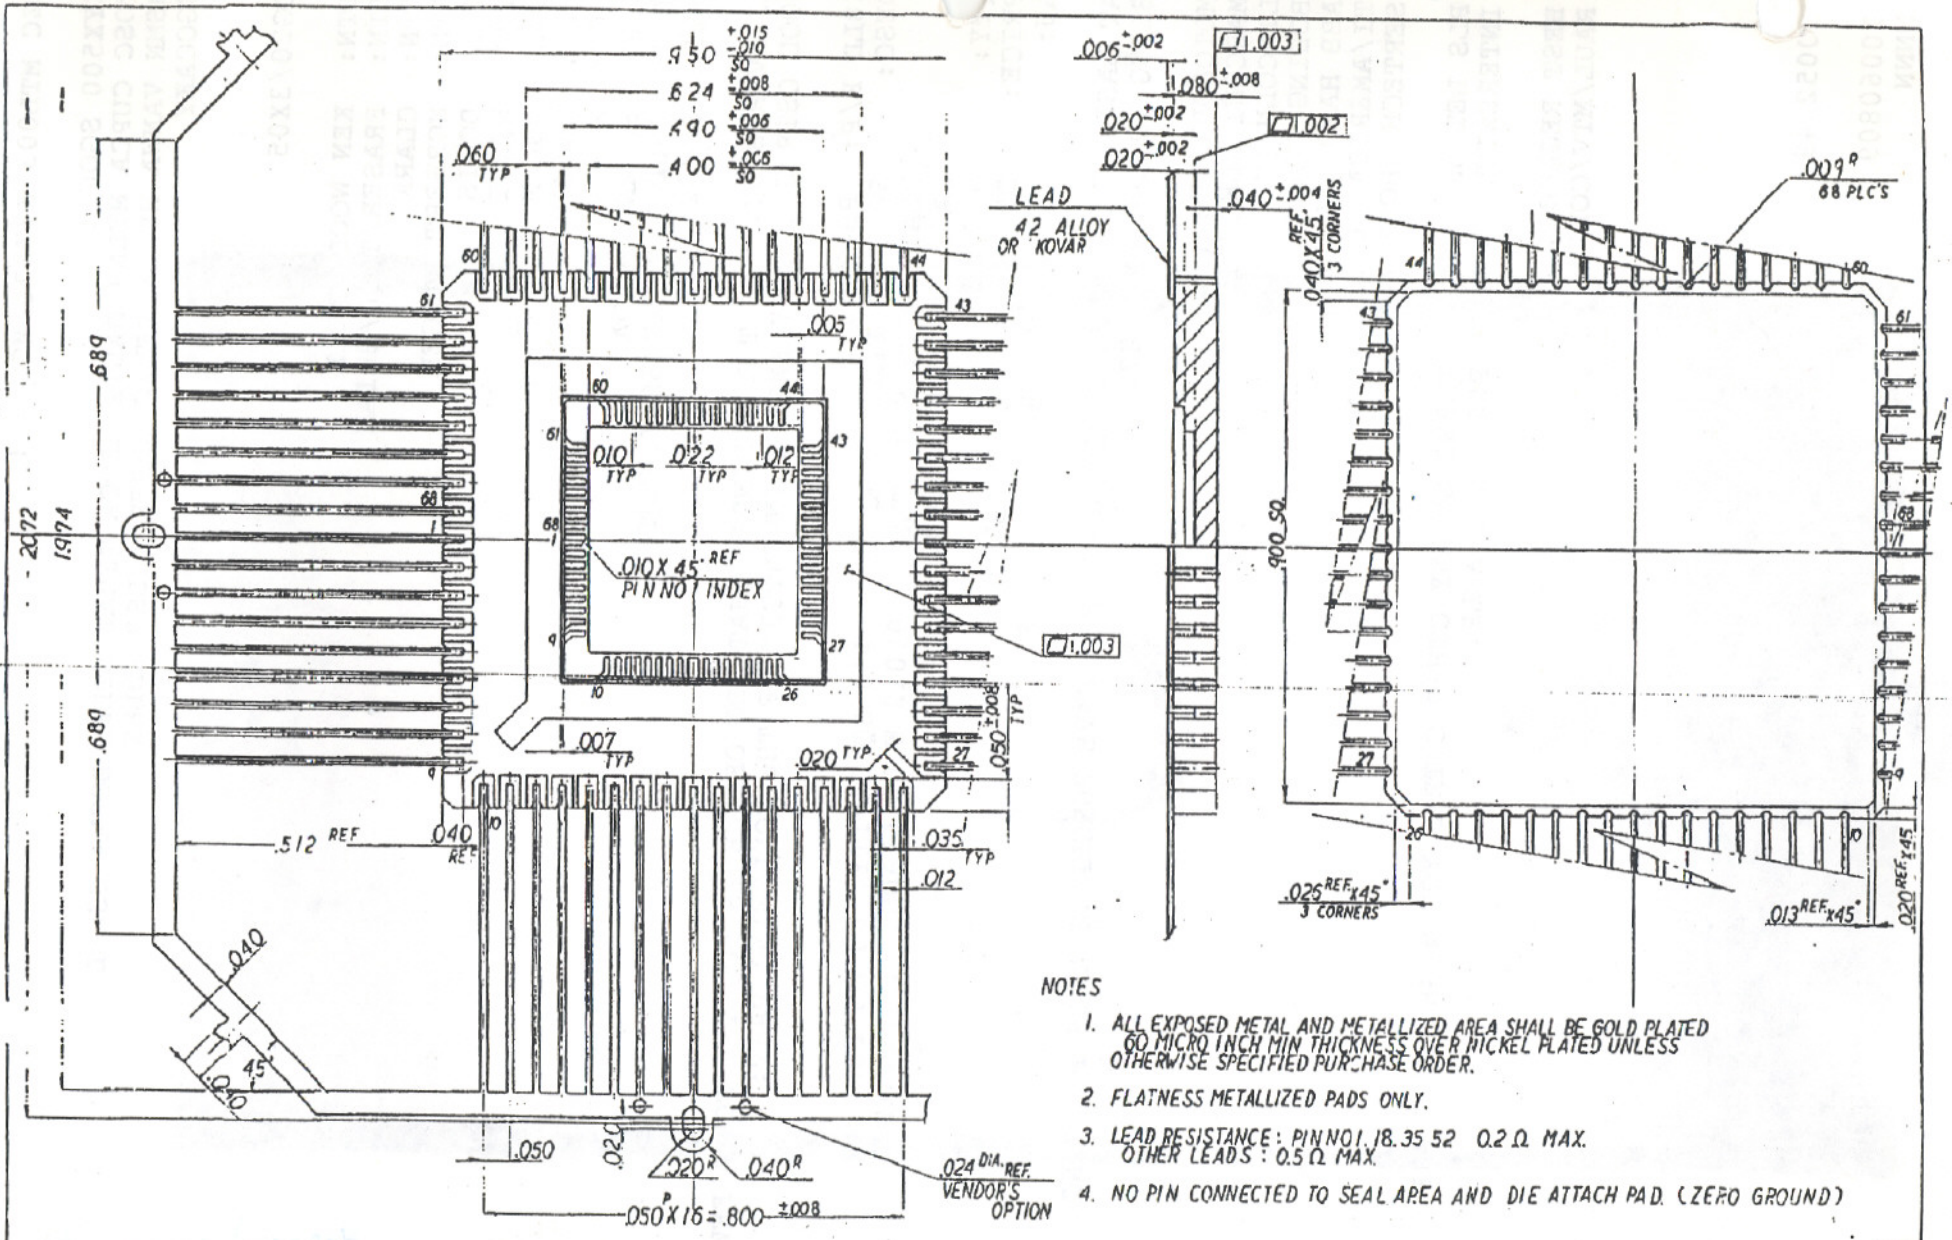

NOTES

1. ALL EXPOSED METAL AND METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCH MIN THICKNESS OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
2. FLATNESS METALLIZED PADS ONLY.
3. LEAD RESISTANCE: PIN NO 1, 18, 35 52 0.2 Ω MAX.
   OTHER LEADS : 0.5 Ω MAX.
4. NO PIN CONNECTED TO SEAL AREA AND DIE ATTACH PAD. (ZERO GROUND)

S=0
D=0

HNO-68FZ

CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME	68 LEAD FLAT PACK (400 SQ CAV.)	TOLERANCES: UNLESS OTHERWISE SPECIFIED	DRAWN	CHECKED
SCALE	MATERIAL	±.005		
6/1	KYOCERA A-440		APPROVED	DATE
				7-9-87

KYOTO CERAMIC CO., LTD. KYOTO JAPAN

DWG No. PB-F87393

BR-68CLF PB-02416 MOD