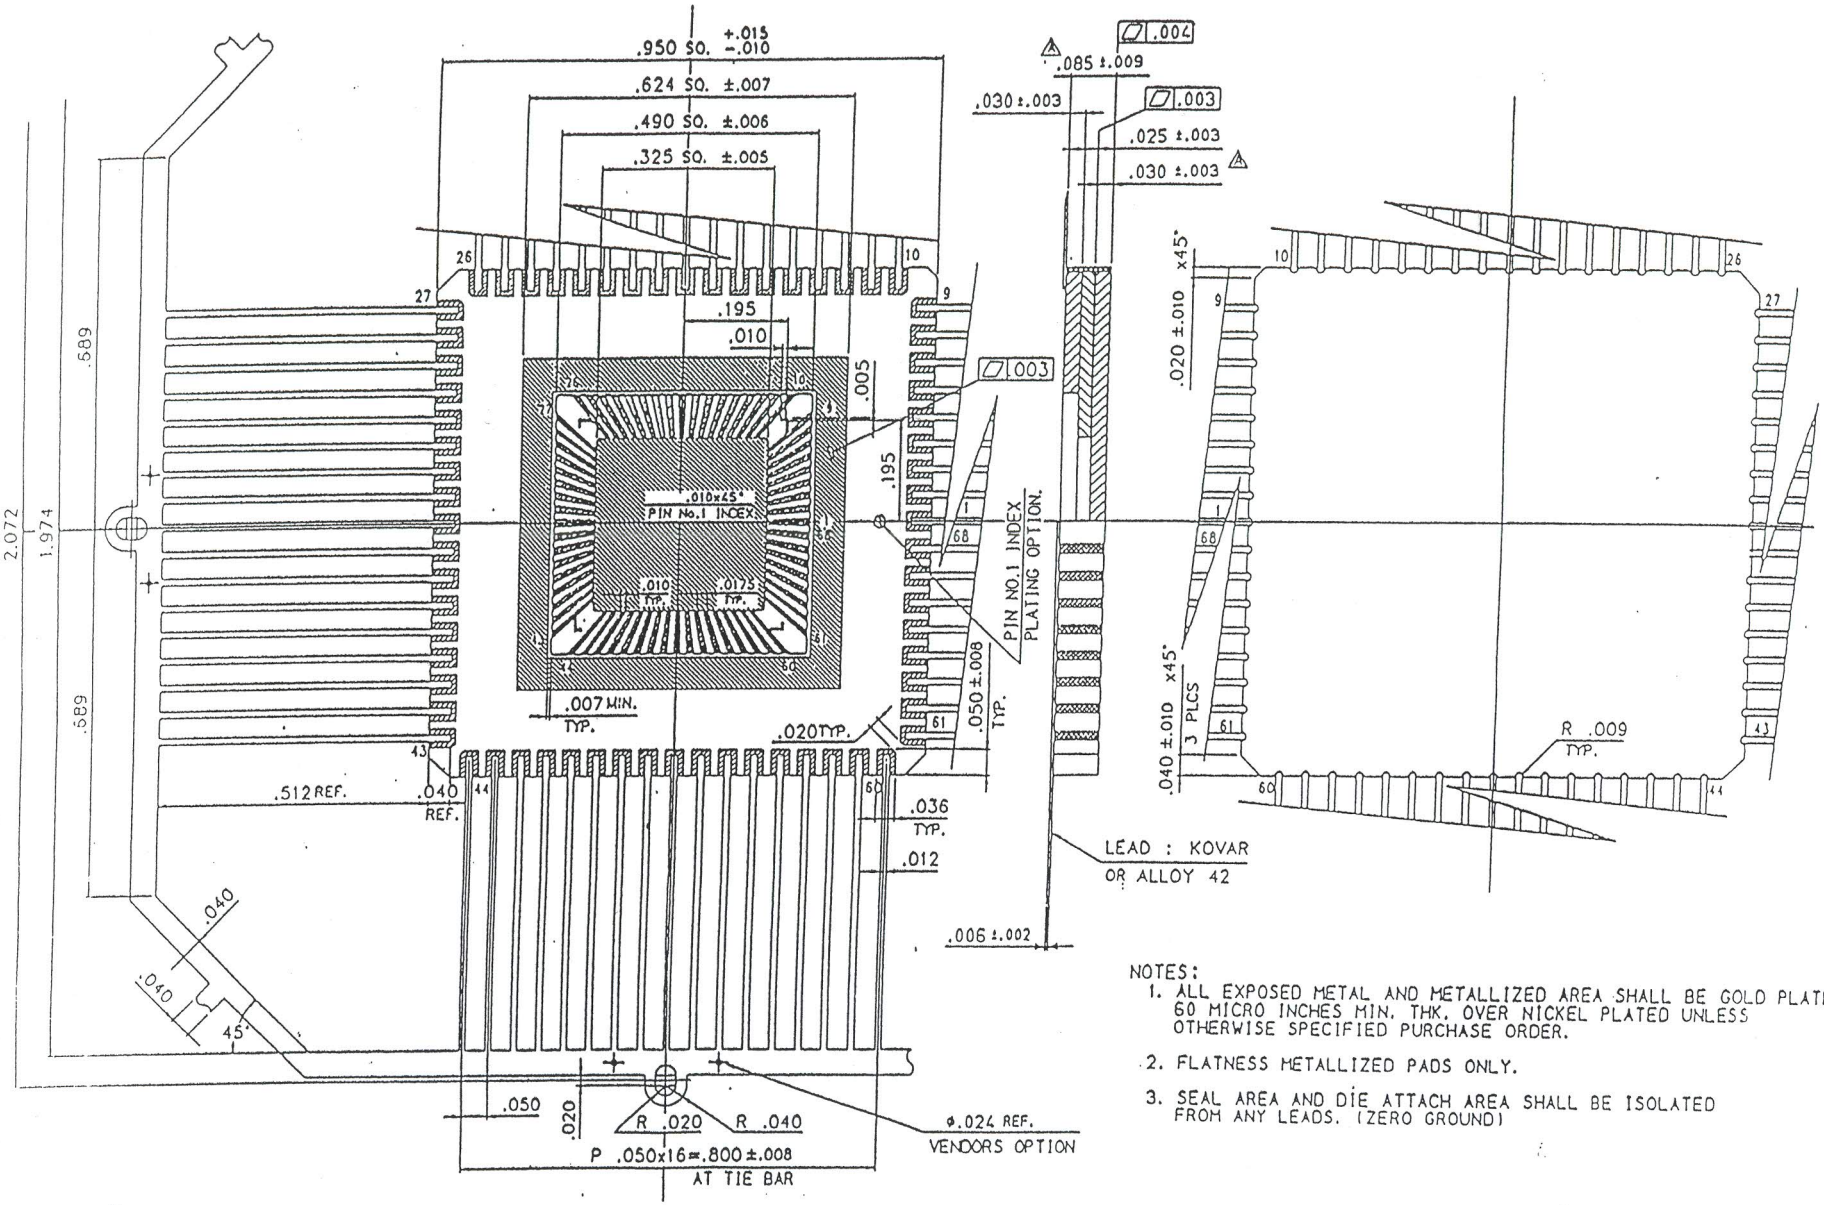

NOTES:

1. ALL EXPOSED METAL AND METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCHES MIN. THK. OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
2. FLATNESS METALLIZED PADS ONLY.
3. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)

MODIFICATIONS										
						NAME 68 CQFP(.325 SQ. CAV.)	TOLERANCES: ±.005	DRAWN T.OMURE	CHECKED A.Y / K.T	APPROVED Y.S	DATE 1-30-'92
						SCALE 6/1	MATERIAL KYOCERA A-440				
△3	CHANGED : LAYER THICKNESS CHANGE	2-26-'92 DATE	T.OMURE DRAWN	A.Y CHECKED	APPROVED	KYOCERA	KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO. PB-F92534-A			SHEET /